

# PLANNING & DESIGN: FAMILY-SIZE DRYER – LINE SERIES™

## T794FI, T784, T754 Vented Dryers


### Unit Dimensions

	US	METRIC
HEIGHT:	33 ½"– 34 ½"	851 – 876 mm
WIDTH:	23 ½"	597 mm
DEPTH:	T753 23 7/8" *	606 mm
	T793FI 23 1/8" **	587 mm
	T783 23 7/8" *	606 mm
DEPTH WITH T753	46 1/8"	1172 mm
DOOR OPEN:T793FI	47 7/8"	1216 mm
	T783 46 1/8"	1172 mm
WEIGHT:	86 lbs	39 kg

### Technical Data

Supply voltage	Single-phase 220 V, 60 Hz
Max Wattage	3000 W

**NOTE:** When on a separate outlet, use 220 V, 20 Amp single-phase circuit. When an ASKO washer is connected, use 220 V, 30 Amp single-phase circuit.

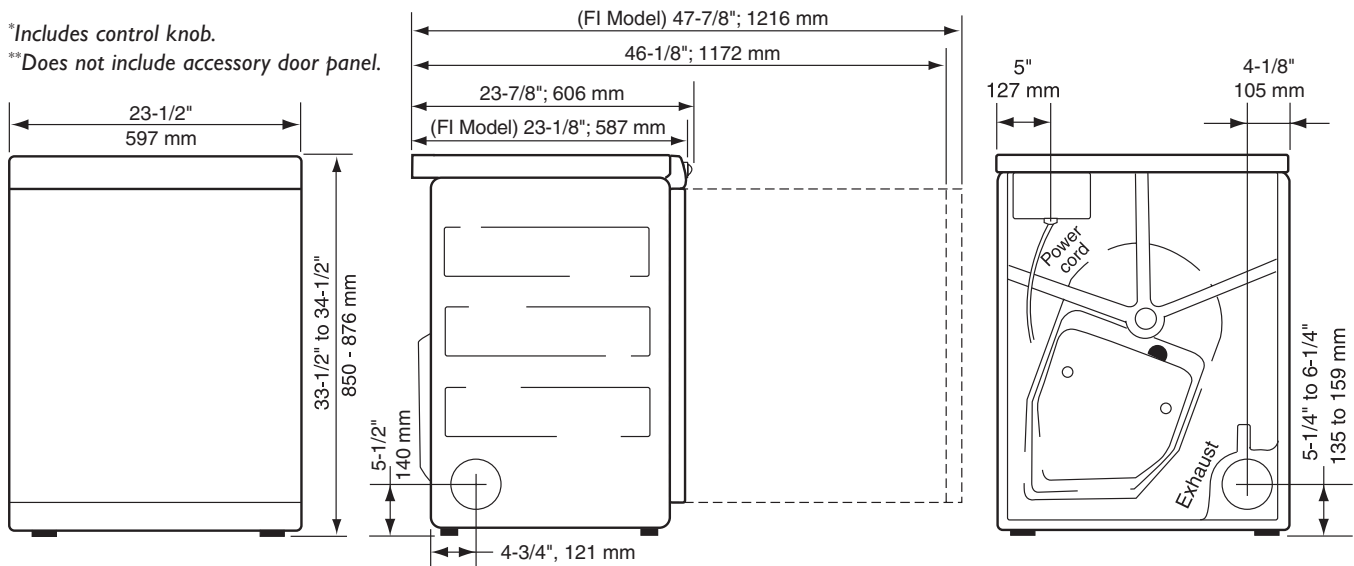

The door hinges on ASKO dryers are shipped left-hinged, but they are reversible. See the ASKO Dryer Use and Care Guide for more information.

When placing the dryer next to a wall or cabinet, be sure to leave ¼" (6 mm) of space between the dryer and the wall or cabinet.

See page 35-36 for stacked washer/dryer dimensions.

See pages 38-40 for cutout dimensions for closet and under-cabinet installations.

**NOTE:** Power cord not supplied with unit.

Specifications are subject to change without notice. See installation instructions for additional details.

### Venting Requirements


**WARNING!** To reduce the risk of fire, vented dryers must be exhausted OUTDOORS or the equivalent.

Never cover the end of the dryer stub or vent hose with anything to catch lint, except for a UL-approved vent basket.

The exhaust hose should be run with as few bends as possible to the point of discharge. Maximum duct length of 60' (1829 cm) is allowed. Make any bends as gentle as possible. A maximum of four 90° bends may be fitted in the hose, otherwise the performance of the dryer will be impeded. Subtract 4' (122 cm) of duct for each 90° elbow. If more than 20' (210 cm) of duct is needed, we recommend increasing the diameter of the duct to 6" or 8" (152 mm or 203 mm).

If the exhaust hose is taken to a wall outlet, a ventilation grill should be fitted to prevent reverse flow of cold air. Fit the ventilation grill to the outside or inside of the wall.

This appliance should not be exhausted into a chimney, a wall, a ceiling, or a concealed space of a building. Only a metal ventilation grill should be used.

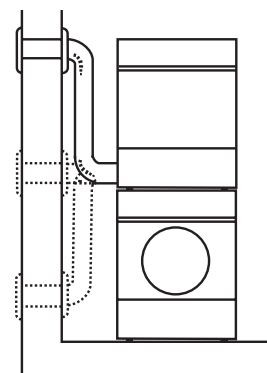

### Installation Examples

Subtract 4 feet (122 cm) for every 90° elbow.