


Serie | 6 Hobs

PXE651FC1E
60 cm Cooktop Induction

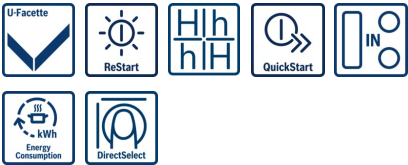

The induction hob with PerfectFry: achieve perfect frying results thanks to automatic temperature control.

- **DirectSelect:** Direct, simple selection of the desired cooking zone, power and additional functions.
- **PerfectFry:** For perfect browning of roasted foods thanks to sensor control with 4 power levels.
- **FlexInduction Zone:** Get more flexibility by combining the cooking zones into one big zone for placing small pots and large cookware.
- **Timer with switch-off function:** Turns off the assigned cooking zone after the set time.
- **Induction:** Fast, precise cooking, easy cleaning and low energy consumption.
- **PowerBoost:** Up to 50% more power for faster heating.

Technical Data

| | |
|---|--------------------------|
| Product name/family : | Cooking zone ceramic |
| Construction type : | Built-in |
| Energy input : | Electric |
| Total number of positions that can be used at the same time : | 4 |
| Type of control setting devices : | DirectSelect 1.0 (Timer) |
| Required niche size for installation (HxWxD) : | 51 x 560-560 x 490-500 |
| Width of the product (mm) : | 592 |
| Dimensions of the product (mm) : | 51 x 592 x 522 |
| Net weight (kg) : | 14.0 |
| Gross weight (kg) : | 15.0 |
| Residual heat indicator : | Separate |
| Location of control panel : | Hob front |
| Basic surface material : | Ceramic |
| Color of surface : | Black |
| Approval certificates : | AENOR, CE |
| Length electrical supply cord (cm) : | 110 |
| EAN code : | 4242002848822 |
| Electrical connection rating (W) : | 7400 |
| Voltage (V) : | 220-240 |
| Frequency (Hz) : | 60; 50 |



Serie | 6 Hobs

PXE651FC1E

60 cm Cooktop Induction

The induction hob with PerfectFry: achieve perfect frying results thanks to automatic temperature control.

Design

- Frameless with faceted edges

Comfort

- 4 induction cooking zones
- Cooking zones: 1 x Ø 400 mmx240 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 190 mm, 2.2 KW (max. Powerlevels 3.7 KW) Induction; 1 x Ø 145 mm, 1.4 KW (max. Power levels 2.2 KW) Induction; 1 x Ø 210 mm, 2.2 KW (max. Power levels 3.7 KW) Induction
- 17 - stage power setting for each cooking zone
- Electronic display
- Time with time programming functions
Alarm clock
- Automatic pan recognition sensor
PowerManagement Function
Automatic Safety switch-off
Control panel lock

Safety and Environment

- Digital 2 stage residual heat indicator residual heat indicator for each cooking zone
- Spill protection

Cooktop type and Special Features

- PerfectFry sensor with 4 temperature settings
- HighSpeed ceramic glass
- Powerboost function for each cooking zone


Power and size

- 7.4 kW total connected load
- Appliance: 592 x 522 mm
- Min. worktop thickness: 30 mm

Serie | 6 Hobs



PXE651FC1E

60 cm Cooktop Induction

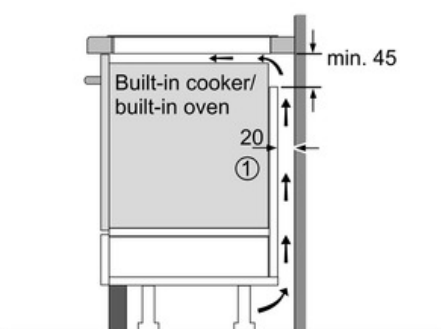


①
Ventilation gap must
be present

All measurements in mm

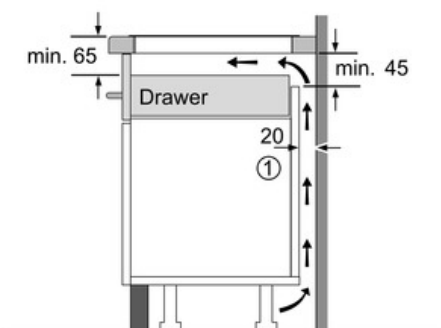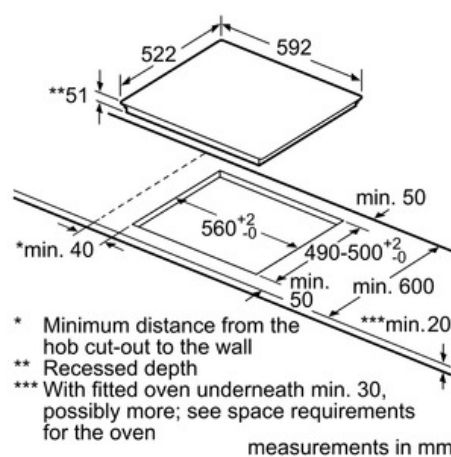

①
Ventilation gap must
be present.

Measurements in mm

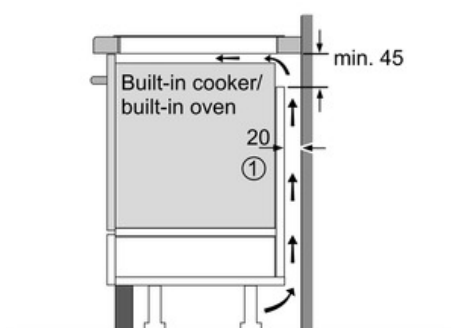

①
Ventilation gap must
be present

All measurements in mm