

Thank you for purchasing this WINIX product

- Read and follow all safety rules and instructions before operating this equipment.
- Please keep this manual for future reference.

Humid Triple Action Humidifier with PLASMAWAVE

HumidiPür™

Winix HumidiPür[™] Triple Action Humidifier simultaneously humidifies and cleans the air. Featuring a 3.17 gallon per day humidification Model: AW600 capacity and 3-Stage air purification with PlasmaWave® Technology.



PLASMAWAVE®

PlasmaWave[®] technology removes air pollutants resulting in cleaner fresher air.



Mist Humidifier

HumidiPür[™] generates very fine and light mist to enhance consistent humidity level.



Auto Mode

WINIX's sensor detecs room humidity level to control fan speed and optimize the humidity level.



Timer

The automatic Timer indicator is used to maintain efficiency throughout the lifetime of the product.



Sleep Mode

Light sensor detects when the room is dark and adjusts the unit to Sleep Mode to reduce power consumption.



CleanCel[®] Anti-Bacterial Coating

HumidiPür[™] has been treated with CleanCel[®] antibacterial coating to prevent growth of bacteria in the water tank and cleaning discs.



Auto Shut-Off

Automatically shuts off when the water bucket is Low.

Table of Contents

Safety Instructions	
Warning	3
Product Information	
Unit Diagram	11
	12
Unit Diagram	

Installation

Selecting a Location	13
Set-Up Instructions	14

Operation

Modes of Operations	15
Care and Maintenance	19

Troubleshooting

FAQ/Solutions	25
Product Specifications	27

Safety Instructions



🚹 Warning


DON'T unplug the unit by pulling on it's power cord.



DON'T bend or place heavy object on the power cord.



DON'T touch the plug with wet hands.



DON'T replace or modify power cord.

If the power cord/plug is damaged, it must be replaced by the manufacturer or a qualified technician.



🚺 Warning

DON'T plug multiple power plugs into an outlet. Plug directly into the wall.



DO unplug the HumidiPür[™] when not in use to save on energy consumption.

DO connect the power cord to only proper power outlet with a ground connection.



DON'T plug power cord into loose or damaged electrical outlet. (This can lead to overheating or electrical shock)



DON'T attempt to repair, alter or dissasemble the unit.





DON'T operate the unit if standing water is present.



Safety Instructions



DON'T operate HumidiPür™ on an uneven surface.



DON'T place the HumidiPür[™] near flammable material (such as gas, aerosols, or benzene).




Attempt to change the bucket and refill with clean water every day.



DON'T spray liquids directly into air washer.



DON'T place the unit on an unstable place such as a table or a sink.



DON'T pour water into the top of the air unit, place in water tank as directed.



🚺 Note

DO unplug the unit and contact your service dealer if the unit comes in contact with water.



DON'T remove the water tank if a child is nearby.



DO unplug the unit and contact your service dealer if it is sunken under water.



DON'T insert ANYTHING into the air inlet or outlet.



DON'T install the unit in the place full of high humidity or dust.



DON'T place anything around the unit to allow children to play or sit on.



Safety Instructions

! Note

DON'T disconnect the power cord during operation.



DO use the HumidiPür™ after assembling the Antimicrobial Disk.

DO unplug the appliance during filling and cleaning.



DON'T insert anything into the air inlet or outlet.

DO unplug the unit and contact your service dealer if any irregular noise or smoke occurs.



DON'T place the unit near a heat source.



DON'T place hands or any body parts near the air outlet during operation.





DON'T place the unit near curtains or other materials that can block the vents of the unit.





DON'T strike or drop the unit.



Note

DON'T allow children to **play** on or near the unit.



DON'T spray flammable liquids or gases into the unit.

DON'T use hot water in the water tank.



DON'T lift the unit by the top.

DON'T install the unit under direct light.





DON'T place clothes and towels on top of air washer while operating.



DO clean Antibacterial disk regularly with warm tap water and allow to air dry.



DON'T use flammable material (such as benzene or alcohol) to clean the unit.



DON'T spray liquids directly into HumidiPür[™] during cleaning.



Safety Instructions

Note (1)

DON'T install the unit near the wall or window.

0-9-

DON'T operate the unit while insecticide is used.



DON'T install the unit whose airflow outlet is facing the wall.



DON'T put the unit near burning cigarette or incense.



DON'T allow water to stay in the water tank for a long time while not in use.



DON'T drink the water left in the water tank or give it to plants or animals.



After cleaning, allow Antibacterial Discs, water tank, and pre-filter to air dry completely.



DON'T operate the unit while water tank is damaged.



DON'T put the unit near a microwave oven or TV.



I Note

DON'T overfill the water tank.



DO dispose of the water to prevent it from freezing in cold weather.



DO unplug the unit and move its water tank when water is removed.



DON'T put the unit near ceilings, walls, furniture, or electronic appliances.



DON'T lift the unit with water still in the water tank.



DO clean the air washer regulary, with a microfiber towel or any other clean wiping material.



DON'T plug in if the power plug is touched with water.




DON'T put magnet or metal material on the top of the unit.




DO use clean tap water without detergent, soap, chemical compounds or hot water (over 104°F).



Product Diagram

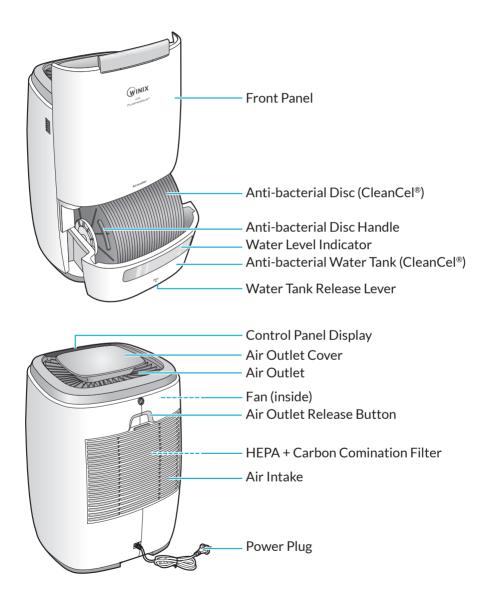


Control Panel

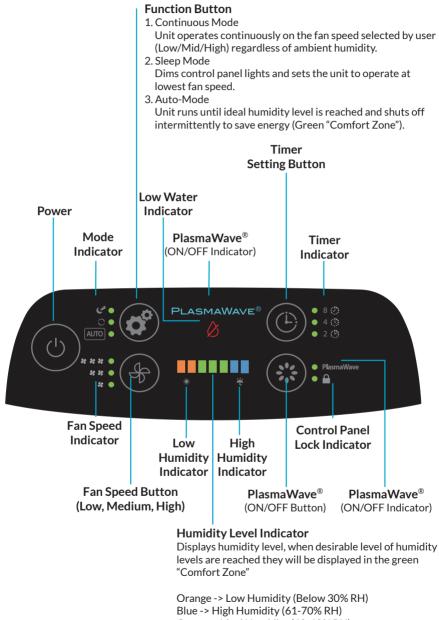

Green -> Ideal Humidity (40-60% RH)

Installation

Selecting a Location

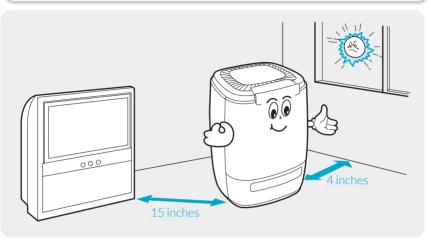

Do not install the unit under direct sunlight.

- Long Exposure to direct sunlight can cause defects.

HumidiPür[™] must be installed and operated on an even surface.

- Vibrations and noise can occur on soft or non-flat surfaces.

Product must be Installed approximately 10 cm/4 inches away from the wall and 30-40 cm/15 inches from other electronic appliances.

Before operating the HumidiPür[™], remove any plastic bags and polyfoams from outside and inside the unit.

Operation

Set-Up Instructions

- 1. Slide water tank out, by using the release lever located below the water tank on the front of the unit.
- 2. Fill the water tank with cool tap water up to the indicator line on the inside of water tank.
- 3. Replace the water tank by sliding it back into the unit until you hear it click into place.
- 4. Gently slide down the front panel and make sure that it is seated properly and lines up correctly.


Make sure to unplug the power cord before filling the unit with water.


- We recommend using filtered water to prolong the life of the product.
- Use cautions when moving the unit filled with water.









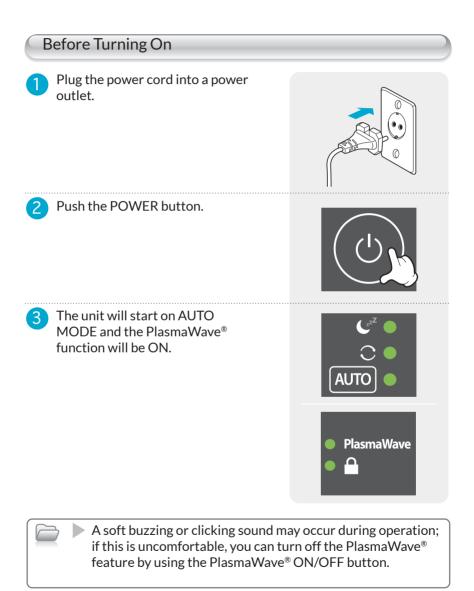

Auto Mode



Push FUNCTION button to select Auto Mode

AIR FLOW:

When ambient humidity is sensed at less that 60%, the unit will operate at "High" fan speed. When the ambient humidity is sensed at greater than 60% the unit will operate at "Low" fan speed.

CLEANING DISCS:

When ambient humidity is sensed at greater than 75% humidity the cleaning discs will stop spinning. When ambient humidity is sensed less than 60%, the disc, resumes to circulate.


Continuous Mode

Push the FUNCTION button to select Continuous Mode.

- Continuous Mode Indicator will illuminate.
- The FUNCTION button will cycle the unit between the following: Auto -> Continuous -> Sleep



Operation

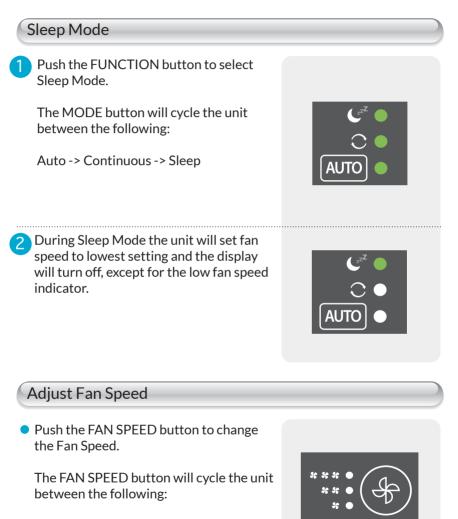

Low -> Med -> High

Adjust Timer

- Push TIMER button to set a timer.
 - The TIMER button will cycle through the unit timer settings:
 - 2 hours -> 4 hours -> 8 hours



PlasmaWave® Technology

During Humidification process

- Push PLASMAWAVE/LOCK button to operate PlasmaWave[®].
 - Use this button to turn PlasmaWave® function ON/OFF

During PlasmaWave[®] operation only


- Push PLASMAWAVE/LOCK button to operate PlasmaWave[®] while the unit OFF.
 - Use this button to turn PlasmaWave[®] function ON/OFF without using the humidification function of the unit.



Lock Button

 Push PLASMAWAVE/LOCK button for more than 3 seconds to activate Lock.



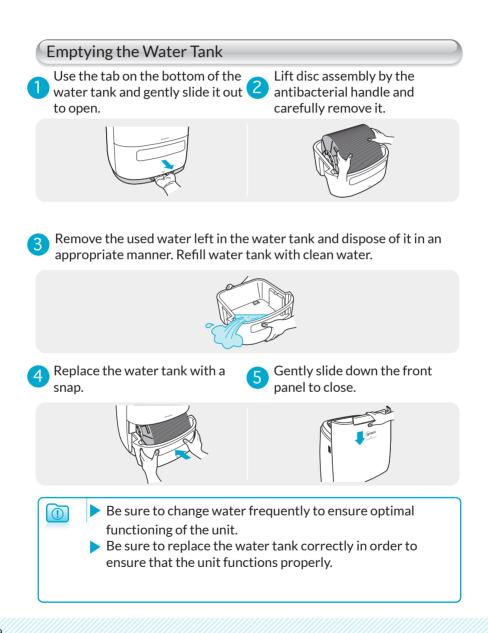

Cleaning Surface

 Clean the outside of the unit with a soft cloth and mild detergent. Wipe clean with a drv cloth.



Cleaning Rear Air Intake Grille

Use the tab on the back cover grille To clean the back cover grille rinse and pull up on the Combo Filter.

lightly under warm water and air dry.





After cleaning, and letting air dry, slide the HEPA + Carbon Filter back into it's original location and replace the back cover grille.



Unplug the HumidiPür[™] before performing any type of maintenance such as cleaning or disassembling.


> Do NOT clean the top portion of the unit with water.

Empty and unplug if not operating for more than 2 days.

Cleaning Anti-bacterial Discs

Be sure to clean the Anti-bacterial Discs once a week

Clean Anti-bacterial Discs with warm tap water and a light detergent.







2 Clean inside of the cycled Anti-bacterial Discs thoroughly.


Fill warm tap water with detergent


in the water tank



CleanCel[®] Anti-bacterial Cleaning Discs are dish washer safe and can be washed in temperatures no greater than 176°F

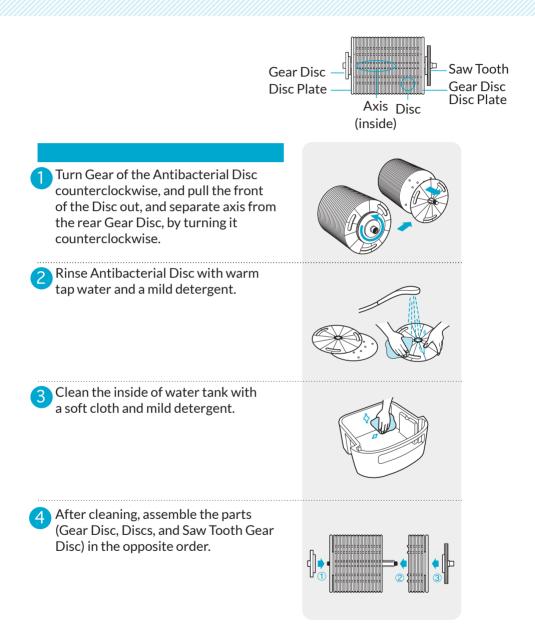

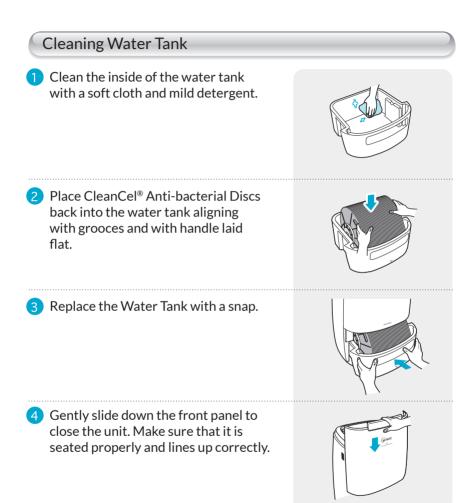

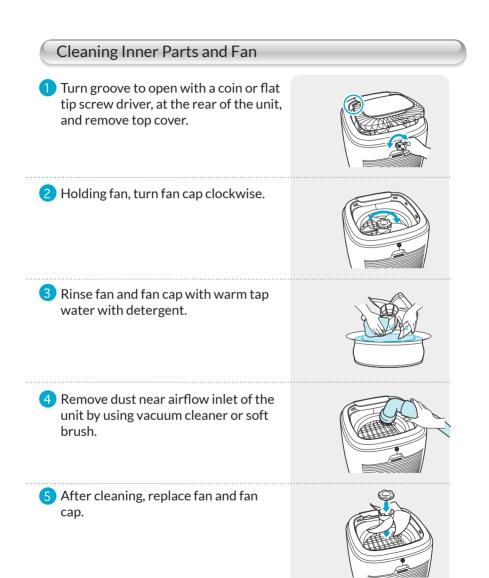


Symptom	Check If:	Solution:
HumidiPür™ does not turn on	Power cord is plugged in.	Plug the power cord in.
	Low Water Indicator light is on.	Fill the water tank
	Water is filled inside water tank.	Make sure the water tank is in place and filled correctly.
Auto Mode is not working	Power cord is plugged in.	Unplug power cord and plug it back in.
	Auto Mode Indicator is on.	Push FUNCTION button to select Auto Mode.
Vibrates or makes	The unit is located on an uneven surface.	Move to an even surface.
Power cord is hot	Power cord is plugged in.	Unplug the power cord and contact customer support.

Symptom	Check If:	Solution:
HumidiPür™ does not turn on	Water is ground water.	Change to tap water.
J. J	Water is too cold or icy.	Use 68°F to 77°F temperature water.
	Fan speed is on low level.	Change to high fan speed.
Function button is not working	Child-Lock mode is on.	Push Plasma/Child Lock button for 3 seconds to turn OFF Child-Lock mode.
Unpleasant odors are present	HumidiPür [™] is being used where strong odors and/or dust is present	 Replace the water in the water tank and change water more frequently. Clean water tank and CleanCel[®] Anti-bacterial Discs.
Water level indicator is on despite water level	Water is left inside the water tank.	Refill the water tank.

Specifications

Model No.	AW600
Power Supply	120V / 60 Hz
Power Consumption	16W
Humdiifying Capacity	3.17 gallons per day
Tank (Max/Full)	1.3 gallons / 1.85 gallons
Weight	15.4 lbs.
Dimensions	13.4" x 17.7" x 13.4"







This marking shown on the product or its literature. Indicates that it should not be disposed with other household wastes at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal. Please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they take this item for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

www.winix.com