

NETGEAR RangeMax™ NEXT Wireless Router WNR834B Reference Manual

NETGEAR

NETGEAR, Inc.
4500 Great America Parkway
Santa Clara, CA 95054 USA

202-10171-01
May 2006

Trademarks

NETGEAR is a trademark of Netgear, Inc.

Microsoft, Windows, and Windows NT are registered trademarks of Microsoft Corporation.

Other brand and product names are registered trademarks or trademarks of their respective holders.

Statement of Conditions

In the interest of improving internal design, operational function, and/or reliability, NETGEAR reserves the right to make changes to the products described in this document without notice.

NETGEAR does not assume any liability that may occur due to the use or application of the product(s) or circuit layout(s) described herein.

Maximum Wireless Signal Rate Derived from IEEE Standard 802.11 Specifications

Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate.

Federal Communications Commission (FCC) Compliance Notice: Radio Frequency Notice

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

European Union Statement of Compliance

Hereby, NETGEAR, Inc. declares that this wireless router is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

Česky [Czech]	NETGEAR, Inc. tímto prohlašuje, že tento RangeMax NEXT Wireless Router WNR834B je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.
Dansk [Danish]	Undertegnede NETGEAR, Inc. erklærer herved, at følgende udstyr RangeMax NEXT Wireless Router WNR834B overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.
Deutsch [German]	Hiermit erklärt NETGEAR, Inc., dass sich das Gerät RangeMax NEXT Wireless Router WNR834B in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet.
Eesti [Estonian]	Käesolevaga kinnitab NETGEAR, Inc. seadme RangeMax NEXT Wireless Router WNR834B vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.
English	Hereby, NETGEAR, Inc., declares that this RangeMax NEXT Wireless Router WNR834B is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.
Español [Spanish]	Por medio de la presente NETGEAR, Inc. declara que el RangeMax NEXT Wireless Router WNR834B cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.
Ελληνική [Greek]	ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ NETGEAR, Inc. ΔΗΛΩΝΕΙ ΟΤΙ RangeMax NEXT Wireless Router WNR834B ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/EK.
Français [French]	Par la présente NETGEAR, Inc. déclare que l'appareil RangeMax NEXT Wireless Router WNR834B est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.
Italiano [Italian]	Con la presente NETGEAR, Inc. dichiara che questo RangeMax NEXT Wireless Router WNR834B è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.
Latviski [Latvian]	Ar šo NETGEAR, Inc. deklarā, ka RangeMax NEXT Wireless Router WNR834B atbilst Direktīvas 1999/5/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.
Lietuvių [Lithuanian]	Šiuo NETGEAR, Inc. deklaruoja, kad šis RangeMax NEXT Wireless Router WNR834B atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.

Nederlands [Dutch]	Hierbij verklaart NETGEAR, Inc. dat het toestel RangeMax NEXT Wireless Router WNR834B in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.
Malti [Maltese]	Hawnhekk, NETGEAR, Inc., jiddikjara li dan RangeMax NEXT Wireless Router WNR834B jikkonforma mal-tijiet essenzjali u ma provvedimenti orajn rilevanti li hemm fid-Dirrettiva 1999/5/EC.
Magyar [Hungarian]	Alulírott, NETGEAR, Inc. nyilatkozom, hogy a RangeMax NEXT Wireless Router WNR834B megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak.
Polski [Polish]	Niniejszym NETGEAR, Inc. oświadczam, że RangeMax NEXT Wireless Router WNR834B jest zgodny z zasadniczymi wymogami oraz pozostałymi stosownymi postanowieniami Dyrektywy 1999/5/EC.
Português [Portuguese]	NETGEAR, Inc. declara que este RangeMax NEXT Wireless Router WNR834B está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.
Slovensko [Slovenian]	NETGEAR, Inc. izjavlja, da je ta RangeMax NEXT Wireless Router WNR834B v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/ES.
Slovensky [Slovak]	NETGEAR, Inc. týmto vyhlasuje, že RangeMax NEXT Wireless Router WNR834B spáda základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.
Suomi [Finnish]	NETGEAR, Inc. vakuuttaa täten että RangeMax NEXT Wireless Router WNR834B tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.
Svenska [Swedish]	Härmed intygar NETGEAR, Inc. att denna [utrustningstyp] står i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.

A printed copy of the EU Declaration of Conformity certificate for this product is provided in the WNR834B product package.

Bestätigung des Herstellers/Importeurs

Es wird hiermit bestätigt, daß das RangeMax NEXT Wireless Router WNR834B gemäß der im BMPT-AmtsblVfg 243/1991 und Vfg 46/1992 aufgeführten Bestimmungen entstört ist. Das vorschriftsmäßige Betreiben einiger Geräte (z.B. Testsender) kann jedoch gewissen Beschränkungen unterliegen. Lesen Sie dazu bitte die Anmerkungen in der Betriebsanleitung.

Das Bundesamt für Zulassungen in der Telekommunikation wurde davon unterrichtet, daß dieses Gerät auf den Markt gebracht wurde und es ist berechtigt, die Serie auf die Erfüllung der Vorschriften hin zu überprüfen.

Certificate of the Manufacturer/Importer

It is hereby certified that the RangeMax NEXT Wireless Router WNR834B has been suppressed in accordance with the conditions set out in the BMPT-AmtsblVfg 243/1991 and Vfg 46/1992. The operation of some equipment (for example,

test transmitters) in accordance with the regulations may, however, be subject to certain restrictions. Please refer to the notes in the operating instructions.

Federal Office for Telecommunications Approvals has been notified of the placing of this equipment on the market and has been granted the right to test the series for compliance with the regulations.

Voluntary Control Council for Interference (VCCI) Statement

This equipment is in the second category (information equipment to be used in a residential area or an adjacent area thereto) and conforms to the standards set by the Voluntary Control Council for Interference by Data Processing Equipment and Electronic Office Machines aimed at preventing radio interference in such residential areas.

When used near a radio or TV receiver, it may become the cause of radio interference.

Read instructions for correct handling.

Customer Support

Refer to the Support Information Card that shipped with your RangeMax NEXT Wireless Router WNR834B.

World Wide Web

NETGEAR maintains a World Wide Web home page that you can access at the universal resource locator (URL) <http://www.netgear.com>. A direct connection to the Internet and a Web browser such as Internet Explorer or Netscape are required.

Product and Publication Details

Model Number:	WNR834B
Publication Date:	May 2006
Product Family:	Wireless Router
Product Name:	RangeMax NEXT Wireless Router WNR834B
Home or Business Product:	Home
Language:	English
Publication Part Number:	202-10171-01

Contents

NETGEAR RangeMax™ NEXT Wireless Router WNR834B Reference Manual

Chapter 1

About This Manual

Audience, Scope, Conventions, and Formats	1-1
How to Use This Manual	1-2
How to Print this Manual	1-2
Revision History	1-3

Chapter 2

Introduction

Package Contents	2-1
The Wireless Router Label	2-1
The Front of the Wireless Router	2-2
The Back of the Wireless Router	2-3
Installing the WNR834B router	2-4
How to Access the Wireless Router Again Later	2-4
Maintenance and Support	2-6

Chapter 3

Wireless Configuration

Observing Performance, Placement, and Range Guidelines	3-1
Implementing Appropriate Wireless Security	3-2
Information to Gather Before Changing Basic Wireless Settings	3-3
Default Factory Settings	3-5
Understanding Wireless Settings	3-6
How to Set Up and Test Basic Wireless Connectivity	3-9
How to Configure WEP	3-11
How to Configure WPA-PSK or WPA2-PSK Wireless Security	3-12
How to Restrict Wireless Access by MAC Address	3-13

Chapter 4

Content Filtering

Content Filtering Overview	4-1
Blocking Access to Internet Sites	4-1
Blocking Access to Internet Services	4-2
Configuring a User Defined Service	4-4
Blocking Services by IP Address Range	4-4
Scheduling When Blocking Will Be Enforced	4-4
Viewing Logs of Web Access or Attempted Web Access	4-5
Configuring E-Mail Alert and Web Access Log Notifications	4-7

Chapter 5

Maintenance

Viewing Wireless Router Status Information	5-1
Viewing a List of Attached Devices	5-5
Configuration File Management	5-5
Backing Up and Restoring the Configuration	5-6
Erasing the Configuration	5-6
Upgrading the Router Software	5-7
Changing the Administrator Password	5-9

Chapter 6

Advanced Configuration of the Router

Configuring Advanced Wireless Settings	6-1
Wireless Card Access List	6-3
Wireless Card Access Setup	6-4
Configuring Port Triggering and Port Forwarding	6-5
Configuring Port Forwarding to Local Servers	6-8
Adding a Custom Service	6-9
Editing or Deleting a Port Forwarding Entry	6-10
Local Web and FTP Server Example	6-10
Multiple Computers for Internet Gaming	6-10
Configuring the WAN Setup Options	6-11
Connecting Automatically, as Required	6-11
Disabling the SPI Firewall	6-12
Setting Up a Default DMZ Server	6-12
Responding to a Ping on the Internet WAN Port	6-12

Setting the MTU Size	6-13
Using the LAN IP Setup Options	6-13
Configuring LAN TCP/IP Setup Parameters	6-14
Using the Router as a DHCP server	6-15
Using Address Reservation	6-15
Using a Dynamic DNS Service	6-16
Configuring Static Routes	6-18
Enabling Remote Management Access	6-20
Using Universal Plug and Play (UPnP)	6-22

Chapter 7

Troubleshooting

Troubleshooting Quick Tips	7-1
Be sure to restart your network in this sequence	7-1
Make sure the Ethernet cables are securely plugged in	7-1
Make sure the wireless settings in the computer and router match exactly.	7-1
Make sure the network settings of the computer are correct.	7-2
Check the router status lights to verify correct router operation.	7-2
Basic Functioning	7-2
Power Light Not On	7-2
Lights Never Turn Off	7-3
LAN or WAN Port Lights Not On	7-3
Troubleshooting the Web Configuration Interface	7-4
Troubleshooting the ISP Connection	7-5
Troubleshooting a TCP/IP Network Using a Ping Utility	7-6
Testing the LAN Path to Your Router	7-6
Testing the Path from Your Computer to a Remote Device	7-7
Restoring the Default Configuration and Password	7-8
Problems with Date and Time	7-9

Appendix A

Technical Specifications

Factory Default Settings	A-1
Technical Specifications	A-3

Appendix B

Related Documents

Chapter 1

About This Manual

This chapter describes the intended audience, scope, conventions, and formats of this manual.

Audience, Scope, Conventions, and Formats


This reference manual assumes that the reader has basic to intermediate computer and Internet skills. However, basic computer network, Internet, firewall, and VPN technologies tutorial information is provided in the Appendices and on the NETGEAR website.


This guide uses the following typographical conventions:


Table 1-1. Typographical Conventions

<i>italics</i>	Emphasis, books, CDs, URL names
bold	User input
<code>fixed</code>	Screen text, file and server names, extensions, commands, IP addresses

This guide uses the following formats to highlight special messages:

	Note: This format is used to highlight information of importance or special interest.
---	--

	Tip: This format is used to highlight a procedure that will save time or resources.
---	--

	Warning: Ignoring this type of note may result in a malfunction or damage to the equipment.
---	--

This manual is written for the WNR834B router according to these specifications:

Table 1-2. Manual Scope






Product Version	RangeMax NEXT Wireless Router WNR834B
Manual Publication Date	May 2006



Note: Product updates are available on the NETGEAR, Inc. web site at <http://kbserver.netgear.com/products/WNR834B.asp>

How to Use This Manual

The HTML version of this manual includes the following:

- Buttons,  and , for browsing forwards or backwards through the manual one page at a time
- A  button that displays the table of contents and an  index button. Double-click on a link in the table of contents or index to navigate directly to where the topic is described in the manual.
- A  button to access the full NETGEAR, Inc. online knowledge base for the product model.
- Links to PDF versions of the full manual and individual chapters.

How to Print this Manual

To print this manual you can choose one of the following several options, according to your needs:

- **Printing a Page in the HTML View.**

Each page in the HTML version of the manual is dedicated to a major topic. Use the *Print* button on the browser toolbar to print the page contents.

- **Printing a Chapter.**

Use the *PDF of This Chapter* link at the top left of any page.

- Click the *PDF of This Chapter* link at the top right of any page in the chapter you want to print. The PDF version of the chapter you were viewing opens in a browser window.



Note: Your computer must have the free Adobe Acrobat reader installed in order to view and print PDF files. The Acrobat reader is available on the Adobe Web site at <http://www.adobe.com>.

- Click the print icon in the upper left of the window.



Tip: If your printer supports printing two pages on a single sheet of paper, you can select this feature to save paper and printer ink.

- **Printing the Full Manual.**

Use the *Complete PDF Manual* link at the top left of any page.

- Click the *Complete PDF Manual* link at the top left of any page in the manual. The PDF version of the complete manual opens in a browser window.
- Click the print icon in the upper left of the window.



Tip: If your printer supports printing two pages on a single sheet of paper, you can select this feature to save paper and printer ink.

Revision History

NETGEAR, Inc. is constantly searching for ways to improve its products and documentation. The following table indicates any changes that may have been made since the WNR834B router was introduced.

Table 1-3. Publication Revision History

Version	Date	Description
v1.0	May 2006	Original publication

Chapter 2

Introduction

This chapter lists the package contents for the RangeMax NEXT Wireless Router WNR834B, describes the front and rear panel layouts, and describes your NETGEAR maintenance and support benefits.

Package Contents

The product package should contain the following items:

- RangeMax NEXT Wireless Router WNR834B.
- AC power adapter.
- Category 5 (CAT5) Ethernet cable.
- *Resource CD*, including:
 - Smart Wizard™ installation assistant
 - The Setup Manual
 - This guide.
- Registration and Warranty Card.
- Support Information Card.

If any of the parts are incorrect, missing, or damaged, contact your NETGEAR dealer. Keep the carton, including the original packing materials, in case you need to return the router for repair.

The Wireless Router Label

View the label on the back of the wireless router to identify the serial number, port connectors, status lights, and default login information.



Figure 2-1

The Front of the Wireless Router

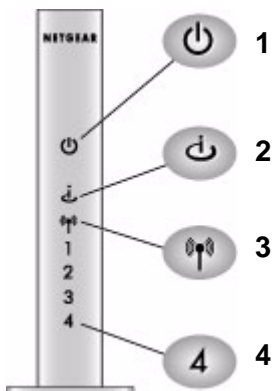


Figure 2-2

You can use the status lights on the front of the wireless router to verify various conditions.

Table 2-1.

Status Light	Activity	Description
1. Power	On -- Amber On -- Green Fast blink -- Green Slow blink -- Green Off	The router integrity test is running. Power is on and the router is ready. Software update is in progress. There is a problem with the wireless router software. Power is not supplied to the router.
2. Internet	On -- Amber On -- Green Blink -- Green	The Ethernet cable is connected but the wireless router has not gotten an Internet address. The wireless router has an Internet address. Data is being communicated with the Internet.
3. Wireless	On	Indicates that the Wireless port is initialized.
4. LAN (Local Area Network) Lights 1-4	On (Green) Blink (Green) On (Amber) Blink (Amber) Off	The local port is connected to a 100 Mbps device. Data is being transmitted at 100 Mbps. The local port has detected a link with a 10 Mbps device. Data is being transmitted at 10 Mbps. No link is detected on this port.

The Back of the Wireless Router

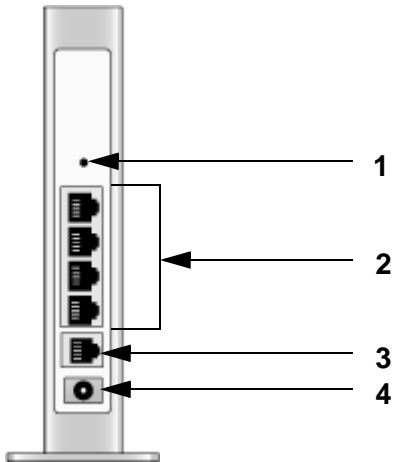


Figure 2-3

The back of the wireless router has the following port connections:

1. Factory default reset button
2. Four local Ethernet ports for connecting the local computers
3. Internet port for connecting to a cable or ADSL modem
4. Power adapter port

Installing the WNR834B router

For installation instructions refer to the setup manual that came on the CD, or refer to one of the online versions listed in the following table.

Table 2-1. RangeMax NEXT Wireless Router WNR834B Online Setup Manuals

Language	Setup Manual URL
English	
German	
French	
Italian	
Spanish	
Dutch	
Swedish	

How to Access the Wireless Router Again Later

The configuration assistant wizard only appears when the router is in its factory default state, and access to the router does not require a login name or password. After you configure the wireless router (or bypass the configuration assistant wizard), it will not appear again, and you will have to log in to the your wireless router to make changes to it.



Note: The factory default state is restored when you use the factory reset button. See [“Restoring the Default Configuration and Password”](#) on page 7-8 for more information on this feature.

To access the router using its login name and password, follow these instructions.

1. Connect to the wireless router by typing **http://www.routerlogin.net** in the address field of your browser, then click **Enter**.






Figure 2-4

	<p>Tip: Connect to the wireless router by typing any one of these three URLs in the address field of your browser, then clicking Enter:</p> <ul style="list-style-type: none">• http://www.routerlogin.com• http://www.routerlogin.net <p>The wireless router will prompt you to enter the user name of admin and the password.</p>
---	---

2. For security reasons, the router has its own user name and password. When prompted, enter **admin** for the router user name and **password** for the router password, both in lower case letters.

	<p>Note: The router user name and password are not the same as any user name or password you may use to log in to your Internet connection.</p>
---	--

A login window like the one shown below opens:



Figure 2-5

Enter the user name and password. The wireless router will display its home page.

When the wireless router is connected to the Internet, click the Knowledge Base or the Documentation link under the Web Support menu to view support information or the documentation for the wireless router.

If you do not click Logout, the wireless router will wait 5 minutes after there is no activity before it automatically logs you out.

Maintenance and Support

NETGEAR offers the following features to help you maximize your use of the WNR834B router:

- Flash memory for firmware upgrades
- Free technical support seven days a week, twenty-four hours a day

Chapter 3

Wireless Configuration

This chapter describes how to configure the wireless features of your WNR834B router. In planning your wireless network, you should consider the level of security required. You should also select the physical placement of your firewall in order to maximize the network speed. For further information on wireless networking, see [“Wireless Communications” in Appendix B](#).

Observing Performance, Placement, and Range Guidelines

The operating distance or range of your wireless connection can vary significantly based on the physical placement of the wireless firewall. The latency, data throughput performance, and notebook power consumption of wireless adapters also vary depending on your configuration choices.



Note: Failure to follow these guidelines can result in significant performance degradation or inability to wirelessly connect to the router. For complete range and performance specifications, please see [“Technical Specifications” on page A-3](#).

For best results, place your firewall:

- Near the center of the area in which your computers will operate.
- In an elevated location such as a high shelf where the wirelessly connected computers have line-of-sight access (even if through walls).
- Away from sources of interference, such as computers, microwaves, and 2.4 GHz cordless phones.
- Away from large metal surfaces.

The time it takes to establish a wireless connection can vary depending on both your security settings and placement. WEP connections can take slightly longer to establish. Also, WEP, WPA-PSK and WPA2-PSK encryption can consume more battery power on a notebook computer.

Implementing Appropriate Wireless Security



Note: Indoors, computers can connect over 802.11b/g wireless networks at ranges of up to 300 feet. Such distances can allow for others outside of your immediate area to access your network.

Unlike wired network data, your wireless data transmissions can be received well beyond your walls by anyone with a compatible adapter. For this reason, use the security features of your wireless equipment. The WNR834B router provides highly effective security features which are covered in detail in this chapter. Deploy the security features appropriate to your needs.

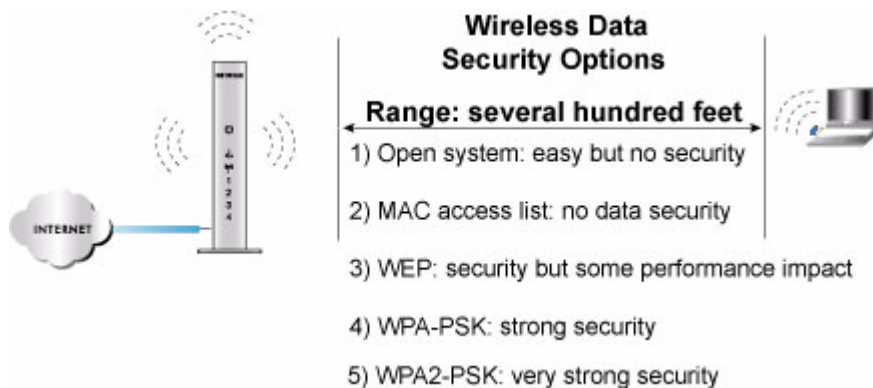


Figure 3-1

There are several ways you can enhance the security of your wireless network.

- **Restrict Access Based on MAC address.** You can restrict access to only trusted computers so that unknown computers cannot wirelessly connect to the WNR834B. MAC address filtering adds an obstacle against unwanted access to your network, but the data broadcast over the wireless link is fully exposed.
- **Turn Off the Broadcast of the Wireless Network Name SSID.** If you disable broadcast of the SSID, only devices that have the correct SSID can connect. This nullifies the wireless network ‘discovery’ feature of some products such as Windows XP, but the data is still fully exposed to a determined snooper using specialized test equipment like wireless sniffers.
- **WEP.** Wired Equivalent Privacy (WEP) data encryption provides data security. WEP Shared Key authentication and WEP data encryption block all but the most determined eavesdropper.

- **WPA-PSK** and **WPA2-PSK**. Wi-Fi Protected Access, Pre-Shared Key (WPA-PSK and WPA2-PSK) data encryption provide strong data security. WPA-PSK and WPA2-PSK block eavesdropping. Because these are new standards, wireless device driver and software availability may be limited.
- **Turn Off the Wireless LAN**. If you disable the wireless LAN, wireless devices cannot communicate with the router at all. You might choose to turn off the wireless LAN when you are away and other users of your network all use wired connections.

Information to Gather Before Changing Basic Wireless Settings

Before customizing your wireless settings, print this form and record the following information. If you are working with an existing wireless network, the person who set up or is responsible for the network will be able to provide this information. Otherwise, you must choose the settings for your wireless network. Either way, record the settings for your wireless network in the spaces below.

- **Wireless Network Name (SSID):** _____ The SSID identifies the wireless network. You can use up to 32 alphanumeric characters. The SSID *is* case sensitive. The SSID in the wireless adapter card must match the SSID of the wireless router. In some configuration utilities (such as in Windows XP), the term “wireless network name” is used instead of SSID.
- **If WEP Authentication is Used**, circle one: **Open System, Shared Key, or Auto**.



Note: If you select **Shared Key**, the other devices in the network will not connect unless they are also set to Shared Key and are configured with the correct key.

- **WEP Encryption key size**. Choose one: **64-bit** or **128-bit**. Again, the encryption key size must be the same for the wireless adapters and the wireless router.
- **Data Encryption (WEP) Keys**. There are two methods for creating WEP data encryption keys. Whichever method you use, record the key values in the spaces below.
 - **Passphrase method**. _____ These characters *are* case sensitive. Enter a word or group of printable characters and click the **Generate Keys** button. Not all wireless devices support the passphrase method.
 - **Manual method**. These values *are not* case sensitive. For 64-bit WEP, enter 10 hex digits (any combination of 0-9 or a-f). For 128-bit WEP, enter 26 hex digits.

Key 1: _____

Key 2: _____

Key 3: _____

Key 4: _____

- **If WPA-PSK or WPA2-PSK Authentication is Used:**

- **Passphrase:** _____ These characters *are* case sensitive. Enter a word or group of printable characters. When you use WPA-PSK, the other devices in the network will not connect unless they are set to WPA-PSK as well and are configured with the correct Passphrase. Similarly, when you use WPA2-PSK, the other devices in the network will not connect unless they are also set to WPA2-PSK and are configured with the correct Passphrase.

Use the procedures described in the following sections to configure the WNR834B. Store this information in a safe place.

Default Factory Settings

When you first receive your WNR834B, the default factory settings are in effect, as shown below. You can restore these defaults with the Factory Default Restore button on the rear panel. After you install the WNR834B router, use the procedures below to customize any of the settings to better meet your networking needs.

FEATURE	DEFAULT FACTORY SETTINGS
Wireless Router Radio	Enabled
Wireless Access List (MAC Filtering)	All wireless stations allowed
SSID broadcast	Enabled
SSID	NETGEAR
802.11b/g RF Channel	Auto
Mode	Up to 270 Mbps
Security	None

Understanding Wireless Settings

To configure the Wireless settings of your firewall, click the **Wireless** link in the main menu of the browser interface. The Wireless Settings menu appears, as shown below.

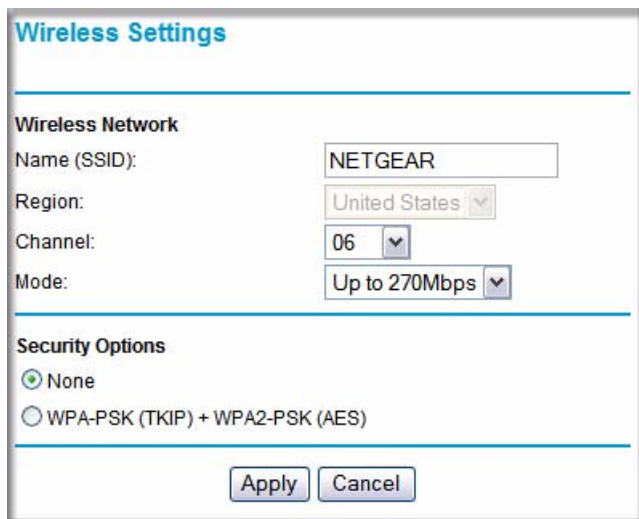


Figure 3-2

- **Name (SSID).** The SSID is also known as the wireless network name. Enter a value of up to 32 alphanumeric characters. In a setting where there is more than one wireless network, different wireless network names provide a means for separating the traffic. Any device you want to participate in a particular wireless network will need to use this SSID for that network. The WNR834B default SSID is: **NETGEAR**.
- **Region.** This field identifies the region where the WNR834B can be used. It may not be legal to operate the wireless features of the wireless router in a region other than one of those identified in this field.



Note: The region selection feature may not be available in all countries.

- **Channel.** This field determines which operating frequency is used. It should not be necessary to change the wireless channel unless you notice interference problems with another nearby

access point. For more information on the wireless channel frequencies, see [“Wireless Communications” in Appendix B](#).

- **Mode.** You can select “g and b”, “Up To 130 Mbps”, and “Up To 270 MBps”. The “g and b” mode provides backward compatibility with the slower 802.11b wireless devices while still enabling 802.11g communications. The “Up to 130 Mbps” mode provides transmission streams that communicate at up to 130 Mbps. The “Up to 270 Mbps” mode will automatically optimize performance based on interference from other access points or clients.



Note: The maximum wireless signal rate is derived from the IEEE Standard 802.11 Specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate.

- **Security Options.** These options are described below. A full explanation of these standards is available in [“Wireless Communications” in Appendix B](#).

Table 3-1. Basic Wireless Security Options

Field	Description
None	No wireless security.
WEP	<p>WEP offers the following options:</p> <ul style="list-style-type: none"> • Open System With Open Network Authentication and 64- or 128-bit WEP Data Encryption, the WNR834B <i>does</i> perform 64- or 128-bit data encryption but <i>does not</i> perform any authentication. • Shared Key Shared Key authentication encrypts the SSID and data. Choose the Encryption Strength (64- or 128-bit data encryption). Manually enter the key values or enter a word or group of printable characters in the Passphrase box. Manually entered keys <i>are</i> case sensitive but passphrase characters <i>are not</i> case sensitive. Note: Not all wireless adapter configuration utilities support passphrase key generation. • Auto The wireless router automatically detects whether Open System or Shared Key is used.
WPA-PSK WPA2-PSK	<p>WPA-Pre-shared Key <i>does</i> perform authentication. WPA-PSK uses TKIP (Temporal Key Integrity Protocol) data encryption and WPA2-PSK uses AES (Advanced Encryption Standard) data encryption. Both dynamically change the encryption keys making them nearly impossible to circumvent.</p> <p>Enter a word or group of printable characters in the Password Phrase box. These characters <i>are</i> case sensitive.</p> <p>Note: Not all wireless adapter configuration utilities support WPA-PSK and WPA2-PSK. Furthermore, client software is required on the client. Windows XP Service Pack 2 and Windows XP Service Pack 1 with WPA patch do include the client software that supports WPA. Nevertheless, the wireless adapter hardware and driver must also support WPA.</p>

To configure the advanced wireless settings of your firewall, click the **Wireless Setup** link in the Advanced section of the main menu of the browser interface. The Advanced Wireless Settings menu appears, as shown below.

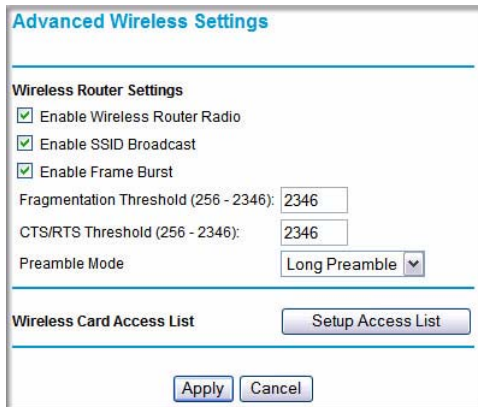


Figure 3-3

- **Enable Wireless Router Radio.** If you disable the wireless router radio, wireless devices cannot connect to the WNR834B.
- **Enable SSID Broadcast.** If you disable broadcast of the SSID, only devices that have the correct SSID can connect. Disabling SSID broadcast nullifies the wireless network ‘discovery’ feature of some products such as Windows XP.
- **Enable Frame Burst.** IFrame Burst allows packet bursting to increase the network performance if a client supports this technology. This option does not degrade the performance of clients that do not support this option. This option is on by default.



Note: The **Fragmentation Threshold**, **CTS/RTS Threshold**, and **Preamble Mode** options are reserved for wireless testing and advanced configuration only. Do not change these settings.

- **Wireless Card Access List.** When the Trusted PCs Only radio button is selected, the WNR834B checks the MAC address of the wireless station and only allows connections to computers identified on the trusted computers list.

How to Set Up and Test Basic Wireless Connectivity



Note: If you use a wireless computer to configure WPA settings, you will be disconnected when you click **Apply**. Reconfigure your wireless adapter to match the new settings or access the wireless router from a wired computer to make any further changes.

Follow the instructions below to set up and test basic wireless connectivity. Once you have established basic wireless connectivity, you can enable security settings appropriate to your needs.

1. Log in to the WNR834B firewall at its default LAN address of <http://www.routerlogin.net> (or <http://192.168.1.1>) with its default user name of **admin** and default password of **password**, or using whatever LAN address and password you have set up.
2. Click **Wireless Settings** in the main menu of the WNR834B firewall.

Wireless Settings

Wireless Network

Name (SSID):

Region:

Channel:

Mode:

Security Options

None

WPA-PSK (TKIP) + WPA2-PSK (AES)

Figure 3-4

3. Choose a suitable descriptive name for the wireless network name (SSID). In the SSID box, enter a value of up to 32 alphanumeric characters. The default SSID is NETGEAR.



Note: The SSID is case sensitive; NETGEAR is not the same as nETgear. Also, the SSID of any wireless access adapters must match the SSID you configure in the RangeMax NEXT Wireless Router WNR834B. If they do not match, you will not get a wireless connection to the WNR834B.

4. Set the Region. Select the region in which the wireless interface will operate.
5. Set the Channel. The default channel may vary according to region.

This field determines which operating frequency is used. It should not be necessary to change the wireless channel unless you notice interference problems with another nearby wireless router or access point. Select a channel that is not being used by any other wireless networks within several hundred feet of your firewall. For more information on the wireless channel frequencies, see [“Wireless Communications” in Appendix B](#).

6. For initial configuration and testing, leave the Wireless Card Access List set to “Everyone” and the Encryption Strength set to “Disabled.”
7. Click **Apply** to save your changes.



Note: If you are configuring the firewall from a wireless computer and you change the firewall’s SSID, channel, or security settings, you will lose your wireless connection when you click **Apply**. You must then change the wireless settings of your computer to match the firewall’s new settings.

8. Configure and test your computers for wireless connectivity.

Program the wireless adapter of your computers to have the same SSID and channel that you configured in the router. Check that they have a wireless link and are able to obtain an IP address by DHCP from the firewall.



Warning: The Network Name (SSID) is case sensitive. If NETGEAR is the Network Name (SSID) in your wireless router, you must enter NETGEAR in your computer's wireless settings. Typing nETgear will not work.

Once your computers have basic wireless connectivity to the firewall, you can configure the advanced wireless security functions of the firewall.

How to Configure WEP

To configure WEP data encryption, follow these steps:



Note: If you use a wireless computer to configure WEP settings, you will be disconnected when you click **Apply**. You must then either configure your wireless adapter to match the wireless router WEP settings or access the wireless router from a wired computer to make any further changes.

1. Log in to the WNR834B firewall at its default LAN address of <http://www.routerlogin.net> with its default user name of **admin** and default password of **password**, or using whatever LAN address and password you have set up.
2. Click **Wireless Settings** in the main menu of the WNR834B firewall.
3. From the Security Options menu, select **WEP**. The WEP options display.
4. Select the Authentication Type and Encryptions strength from the drop-down lists.

The screenshot shows the 'Security Options' configuration page. Under 'Security Options', the 'WEP' radio button is selected. Below this, the 'Security Encryption (WEP)' section has 'Authentication Type' set to 'Automatic' and 'Encryption Strength' set to '64 bit'. The 'Security Encryption (WEP) Key' section includes a 'Passphrase' field with a 'Generate' button, and four 'Key' fields (Key 1 through Key 4), with 'Key 1' selected. At the bottom are 'Apply' and 'Cancel' buttons.

Figure 3-5

5. You can manually or automatically program the four data encryption keys. These values must be identical on all computers and Access Points in your network.
 - Automatic—Enter a word or group of printable characters in the Passphrase box and click the **Generate** button. The passphrase is case sensitive; NETGEAR is not the same as nETgear. The four key boxes is automatically populated with key values.

- Manual — Enter ten hexadecimal digits (any combination of 0-9, a-f, or A-F). These entries are not case sensitive; AA is the same as aa.
Select which of the four keys to activate.

See “[Wireless Communications](#)” in [Appendix B](#) for a full explanation of each of these options, as defined by the IEEE 802.11 wireless communication standard.

6. Click **Apply** to save your settings.

How to Configure WPA-PSK or WPA2-PSK Wireless Security



Note: Not all wireless adapters support WPA. Furthermore, client software is also required. Windows XP with Service Pack 2 does include WPA support. Nevertheless, the wireless adapter hardware and driver must also support WPA. For instructions on configuring WPA-PSK security, consult the documentation for the product you are using.

To configure WPA-PSK or WPA2-PSK, follow these steps:

1. Click **Wireless Settings** in the Setup section of the main menu. Select g and b mode from the Mode list to view all the options. If you are using 130 Mbps or 270 Mbps mode, you will only see the **WPA-PSK [TKIP] + WPA2-PSK [AES]** option.
2. The **WPA-PSK [TKIP] + WPA2-PSK [AES]** is the most flexible, since it allows clients using either WPA-PSK or WPA2-PSK.

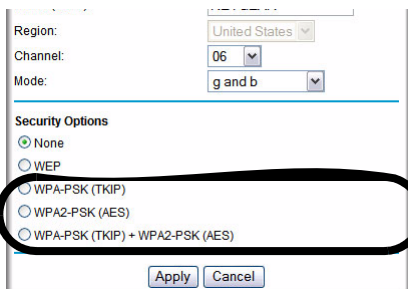


Figure 3-6

3. Enter a word or group of 8-63 printable characters in the Passphrase box.
4. Click **Apply** to save your settings.

How to Restrict Wireless Access by MAC Address

To restrict access based on MAC addresses, follow these steps:

1. Log in to the WNR834B firewall at its default LAN address of <http://www.routerlogin.net> with its default user name of **admin** and default password of **password**, or using whatever LAN address and password you have set up.



Note: When configuring the firewall from a wireless computer whose MAC address is not in the Trusted PC list, if you select **Turn Access Control On**, you will lose your wireless connection when you click **Apply**. You must then access the wireless router from a wired computer or from a wireless computer which is on the access control list to make any further changes.


2. Click **Wireless Settings** in the **Advanced** section of the main menu of the WNR834B firewall.
3. From the Wireless Settings menu, click **Setup Access List** to display the Wireless Access menu shown below.



Figure 3-7

4. Click the **Turn Access Control On** check box.

- Click **Add** to add a wireless device to the wireless access control list. The Wireless Card Access Setup dialog displays.

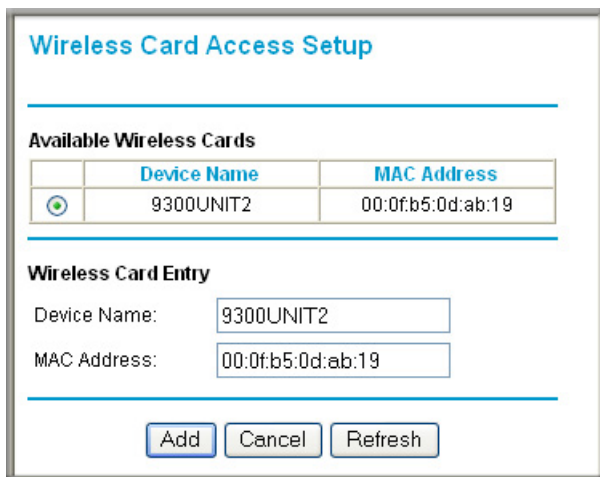

The image shows a dialog box titled "Wireless Card Access Setup". It contains a section for "Available Wireless Cards" with a table listing one device: "9300UNIT2" with MAC address "00:0f:b5:0d:ab:19". Below this is a "Wireless Card Entry" section with input fields for "Device Name" (containing "9300UNIT2") and "MAC Address" (containing "00:0f:b5:0d:ab:19"). At the bottom are "Add", "Cancel", and "Refresh" buttons.

	Device Name	MAC Address
<input type="checkbox"/>	9300UNIT2	00:0f:b5:0d:ab:19

Wireless Card Entry

Device Name:

MAC Address:

Figure 3-8

- In the Available Wireless Cards list, either select from the list of available wireless cards the WNR834B has found in your area, or enter the MAC address and device name for a device you plan to use. You can usually find the MAC address printed on the wireless adapter.



Note: You can copy and paste the MAC addresses from the firewall's Attached Devices menu into the MAC Address box of this menu. To do this, configure each wireless computer to obtain a wireless link to the firewall. The computer should then appear in the Attached Devices menu.

- Click **Add** to add this wireless device to the Wireless Card Access List. The screen changes back to the list screen.
- Repeat [step 5](#) to [step 7](#) for each additional device you wish to add to the list.
- Be sure to click **Apply** to save your Wireless Card Access List settings.

Now, only devices on this list are allowed to wirelessly connect to the WNR834B.

Chapter 4

Content Filtering

This chapter describes how to use the content filtering features of the RangeMax NEXT Wireless Router WNR834B to protect your network. These features can be found by clicking on the **Content Filtering** heading in the main menu of the browser interface.

Content Filtering Overview

The RangeMax NEXT Wireless Router WNR834B provides you with Web content filtering options, plus browser activity reporting and instant alerts via e-mail. Parents and network administrators can establish restricted access policies based on time of day, Web addresses and Web address keywords. You can also block Internet access by applications and services, such as chat or games.

Blocking Access to Internet Sites

The WNR834B router can restrict access based on Web addresses and Web address keywords. Up to 255 entries are supported in the Keyword list. The Block Sites menu is shown here.

The screenshot shows the 'Block Sites' configuration page. It features a 'Keyword Blocking' section with three radio button options: 'Never' (selected), 'Per Schedule', and 'Always'. Below this is a text input field for 'Type keyword or domain name here.' with an 'Add Keyword' button. A list box below shows 'discodanny' as a blocked keyword. There are 'Delete Keyword' and 'Clear List' buttons. At the bottom, there is a checkbox for 'Allow Trusted IP Address To Visit Blocked Sites' and a 'Trusted IP Address' field with four input boxes containing '0', '0', '0', and '0'. 'Apply' and 'Cancel' buttons are at the very bottom.

Figure 4-1

To enable keyword blocking, select either **Per Schedule** or **Always**, then click **Apply**. If you want to block by schedule, be sure to specify a time period in the Schedule menu. For scheduling, see [“Scheduling When Blocking Will Be Enforced” on page 4-4](#).

To add a keyword or domain, type it in the Keyword box, click **Add Keyword**, then click **Apply**.

To delete a keyword or domain, select it from the list, click **Delete Keyword**, then click **Apply**.

Keyword application examples:

- If the keyword “XXX” is specified, the URL <http://www.badstuff.com/xxx.html> is blocked.
- If the keyword “.com” is specified, only Web sites with other domain suffixes (such as .edu or .gov) can be viewed.
- If you wish to block all Internet browsing access during a scheduled period, enter the keyword “.” and set the schedule in the Schedule menu.

To specify a Trusted User, enter that computer’s IP address in the Trusted User box and click **Apply**.

You may specify one Trusted User, which is a computer that is exempt from blocking and logging. Since the Trusted User is identified by IP address, you should configure that computer with a fixed IP address.

Blocking Access to Internet Services

The WNR834B router allows you to block the use of certain Internet services by computers on your network. This is called service blocking or port filtering. The Block Services menu is below:

Block Services

Services Blocking

Never
 Per Schedule
 Always

Service Table

#	Service Type	Port	IP
---	--------------	------	----

Add Edit Delete

Apply Cancel

Figure 4-2

Services are functions performed by server computers at the request of client computers. For example, Web servers serve Web pages, time servers serve time and date information, and game hosts serve data about other players' moves. When a computer on your network sends a request for service to a server computer on the Internet, the requested service is identified by a service or port number. This number appears as the destination port number in the transmitted IP packets. For example, a packet that is sent with destination port number 80 is an HTTP (Web server) request.

To enable service blocking, select either **Per Schedule** or **Always**, then click **Apply**. If you want to block by schedule, be sure to specify a time period in the Schedule menu. For scheduling, see [“Scheduling When Blocking Will Be Enforced”](#) on page 4-4.

To specify a service for blocking, click **Add**. The Block Services Setup menu appears, as shown below:

Block Services Setup

Service Type: AIM

Protocol: TCP

Starting Port: 5190 (1~65534)

Ending Port: 5190 (1~65534)

Service Type/User Defined: AIM

Filter Services For :

Only This IP Address: 192 . 168 . 1 .

IP Address Range: 192 . 168 . 1 . to 192 . 168 . 1 .

All IP Addresses

Add Cancel

Figure 4-3

From the **Service Type** list, select the application or service to be allowed or blocked. The list already displays several common services, but you are not limited to these choices. To add any additional services or applications that do not already appear, select **User Defined**.

Configuring a User Defined Service

To define a service, first you must determine which port number or range of numbers is used by the application. The service numbers for many common protocols are defined by the Internet Engineering Task Force (IETF) and published in RFC1700, “Assigned Numbers.” Service numbers for other applications are typically chosen from the range 1024 to 65535 by the authors of the application. This information can usually be determined by contacting the publisher of the application or from user groups of newsgroups.

Enter the Starting Port and Ending Port numbers. If the application uses a single port number, enter that number in both boxes.


If you know that the application uses either TCP or UDP, select the appropriate protocol. If you are not sure, select **Both**.

Blocking Services by IP Address Range

Under “Filter Services For”, you can block the specified service for a single computer, a range of computers (having consecutive IP addresses), or all computers on your network.

Scheduling When Blocking Will Be Enforced

The WNR834B router allows you to specify when blocking is enforced. The Schedule menu is shown below:

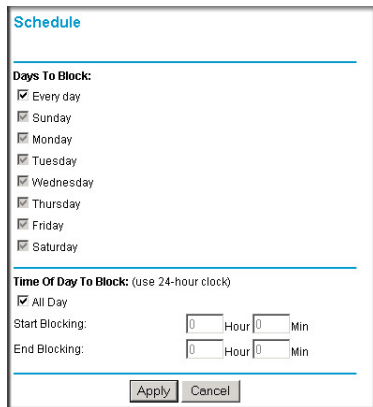

The screenshot shows a web-based configuration page titled "Schedule". It contains two main sections. The first section, "Days To Block:", has a list of days with checkboxes: "Every day" (checked), "Sunday", "Monday", "Tuesday", "Wednesday", "Thursday", "Friday", and "Saturday". The second section, "Time Of Day To Block: (use 24-hour clock)", has a checkbox for "All Day" (checked). Below this, there are two rows of input fields: "Start Blocking:" and "End Blocking:", each with "Hour" and "Min" sub-labels and numeric input boxes. At the bottom of the form are "Apply" and "Cancel" buttons.

Figure 4-4

Use this schedule for blocking content.

- Days to Block. Select days to block by checking the appropriate boxes. Select **Every day** to check the boxes for all days. Click **Apply**.
- Time of Day to Block. Select a start and end time in 24-hour format. Select **All day** for 24-hour blocking. Click **Apply**.

Be sure to select your Time Zone in the E-Mail menu.

Viewing Logs of Web Access or Attempted Web Access

The log is a detailed record of the Web sites you have accessed or attempted to access. Up to 128 entries are stored in the log. Log entries only appear when keyword blocking is enabled, and no log entries are made for the Trusted User. An example is shown below:

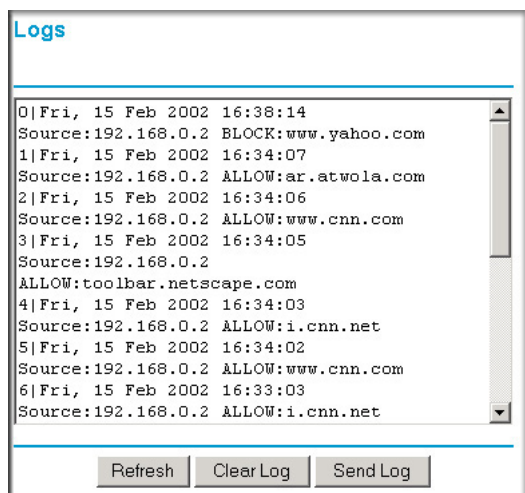


Figure 4-5

Log entries are described in the following table.

Table 4-1. Log entry descriptions

Field	Description
Date and Time	The date and time the log entry was recorded.
Source IP	The IP address of the initiating device for this log entry.

Table 4-1. Log entry descriptions

Field	Description
Target address	The name or IP address of the Web site or newsgroup visited or attempted to access.
Action	This field displays whether the access was blocked or allowed.

Log action buttons are described in the following table.

Table 4-2. Log action buttons

Field	Description
Refresh	Click this button to refresh the log screen.
Clear Log	Click this button to clear the log entries.
Send Log	Click this button to E-mail the log immediately.

Configuring E-Mail Alert and Web Access Log Notifications

In order to receive logs and alerts by E-mail, you must provide your E-mail information in the E-Mail menu, shown below:

E-mail

Turn E-mail Notification On

Send Alerts and Logs Via E-mail

Your Outgoing Mail Server:

Send To This E-mail Address:

Send Alert Immediately

When Someone Attempts To Visit A Blocked Site.

Send Logs According to this Schedule

None

Day

Time a.m. p.m.

Time Zone

(GMT-08:00) Pacific Time (US Canada)

Automatically Adjust for Daylight Savings Time

Current Time: Friday, 07 Oct 2005 13:02:44

Figure 4-6

- Turn e-mail notification on.
Check this box if you wish to receive e-mail logs and alerts from the router.
- Your outgoing mail server .
Enter the name of your ISP's outgoing (SMTP) mail server (such as mail.myISP.com). You may be able to find this information in the configuration menu of your e-mail program. If you leave this box blank, log and alert messages will not be sent via e-mail.
- Send to this e-mail address.
Enter the e-mail address to which logs and alerts are sent. This e-mail address will also be used as the From address. If you leave this box blank, log and alert messages will not be sent via e-mail.

You can specify that logs are automatically sent to the specified e-mail address with these options:

- Send alert immediately.
Check this box if you would like immediate notification of attempted access to a blocked site.
- Send logs according to this schedule
Specifies how often to send the logs: Hourly, Daily, Weekly, or When Full.

- Day for sending log.
Specifies which day of the week to send the log. Relevant when the log is sent weekly or daily.
- Time for sending log.
Specifies the time of day to send the log. Relevant when the log is sent daily or weekly.

If the Weekly, Daily or Hourly option is selected and the log fills up before the specified period, the log is automatically e-mailed to the specified e-mail address. After the log is sent, the log is cleared from the router's memory. If the router cannot e-mail the log file, the log buffer may fill up. In this case, the router overwrites the log and discards its contents.

The WNR834B router uses the Network Time Protocol (NTP) to obtain the current time and date from one of several Network Time Servers on the Internet. In order to localize the time for your log entries, you must specify your Time Zone:

- Time Zone.
Select your local time zone. This setting is used for the blocking schedule and for time-stamping log entries.
- Adjust for Daylight Savings Time.
Check this box if your time zone is currently under daylight savings time.


Chapter 5

Maintenance

This chapter describes how to use the maintenance features of your RangeMax NEXT Wireless Router WNR834B. These features can be found by clicking on the **Maintenance** heading in the main menu of the browser interface.

Viewing Wireless Router Status Information

The Router Status menu provides status and usage information. From the main menu of the browser interface, click **Maintenance**, then select **Router Status** to view the Router Status screen, shown below.

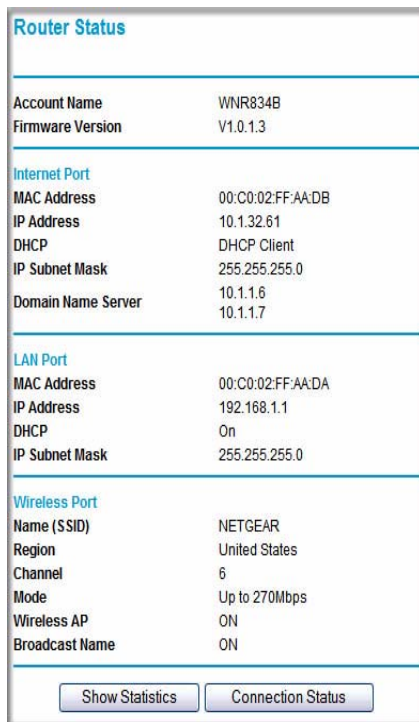

Router Status	
Account Name	WNR834B
Firmware Version	V1.0.1.3
Internet Port	
MAC Address	00:C0:02:FF:AA:DB
IP Address	10.1.32.61
DHCP	DHCP Client
IP Subnet Mask	255.255.255.0
Domain Name Server	10.1.1.6 10.1.1.7
LAN Port	
MAC Address	00:C0:02:FF:AA:DA
IP Address	192.168.1.1
DHCP	On
IP Subnet Mask	255.255.255.0
Wireless Port	
Name (SSID)	NETGEAR
Region	United States
Channel	6
Mode	Up to 270Mbps
Wireless AP	ON
Broadcast Name	ON
<input type="button" value="Show Statistics"/> <input type="button" value="Connection Status"/>	

Figure 5-1

This screen shows the following parameters:


Table 5-1. Wireless Router Status Fields

Field	Description
Account Name	This field displays the Host Name assigned to the router.
Firmware Version	This is the version of the current software the router is using. This will change if you upgrade your router.
Internet Port	These parameters apply to the Internet (WAN) port of the router.
MAC Address	This field displays the Media Access Control address, the physical address, being used by the Internet (WAN) port of the router.
IP Address	This field displays the IP address being used by the Internet (WAN) port of the router. If no address is shown, or is 0.0.0.0, the router cannot connect to the Internet.
DHCP	If set to None, the router is configured to use a fixed IP address on the WAN. If set to DHCP Client, the router is configured to obtain an IP address dynamically from the ISP.
IP Subnet Mask	This field displays the IP Subnet Mask being used by the Internet (WAN) port of the router. For an explanation of subnet masks and subnet addressing, see "Internet Networking and TCP/IP Addressing" in Appendix B .
Domain Name Server	This field displays the Domain Name Server addresses being used by the router. A Domain Name Server translates human-language URLs, such as http://www.netgear.com , into IP addresses.
LAN Port	These parameters apply to the Local (LAN) port of the router.
MAC Address	This field displays the Media Access Control address, the physical address, being used by the LAN port of the router.
IP Address	This field displays the IP address being used by the Local (LAN) port of the router. The default is 192.168.1.1
DHCP	Identifies if the router's built-in DHCP server is active for the LAN attached devices.
IP Subnet Mask	This field displays the IP Subnet Mask being used by the Local (LAN) port of the router. The default is 255.255.255.0

Table 5-1. Wireless Router Status Fields (continued)

Field	Description
Wireless Port	These parameters apply to the Wireless port of the router.
Name (SSID)	This field displays the wireless network name (SSID) being used by the wireless port of the router. The default is NETGEAR.
Region	This field displays the geographic region where the router being used. It may be illegal to use the wireless features of the router in some parts of the world.
Channel	Identifies the channel of the wireless port being used. See “Wireless Communications” in Appendix B for the frequencies used on each channel. In “Up to 240 Mbps” mode, there are two channels: a primary channel (P) and a secondary channel (S).
Mode	Indicates the router communication mode: 802.11g and 802.11b, 802.11g only, Up To 126 Mbps, or Up To 240 Mbps.
Wireless AP	Indicates if the Router Radio feature of the Router is enabled. If not enabled, the Wireless LED on the front panel will be off.
Broadcast Name	Indicates if the router is broadcasting its SSID

Click on the **Connection Status** button to display the connection status, as shown below.

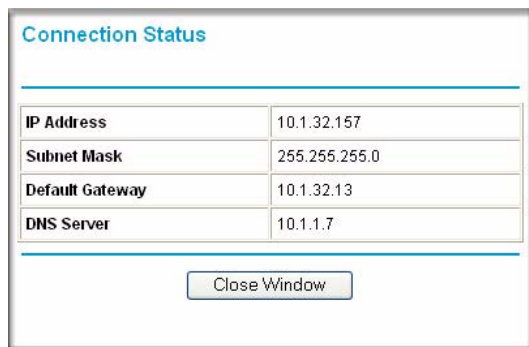**Figure 5-2**

This screen shows the following statistics:

Table 5-2: Connection Status Items

Item	Description
IP Address	The WAN (Internet) IP Address assigned to the router.
Subnet Mask	The WAN (Internet) Subnet Mask assigned to the router.
Default Gateway	The WAN (Internet) default gateway the router communicates with.
DNS Server	The IP address of the DNS server which provides network name to IP address translation.

Click the **Show Statistics** button to display router usage statistics, as shown below.

Port	Status	TxPkts	RxPkts	Collisions	Tx B/s	Rx B/s	Up Time
WAN	STATIC	2242	22821	0	0	0	00:00:00
LAN	100M/Full	4869	4247	0	988	21	05:33:33
WLAN	54M/240M	1044	0	0	3	0	04:58:45

System Up Time 05:34:15

Poll Interval: (secs)

Figure 5-3

This screen shows the following statistics:

Table 5-3: Router Statistics Items


Item	Description
System Up Time	The amount of time since the router was last restarted.
Port	The statistics for the WAN (Internet) and LAN (local) ports. For each port, the screen displays:
Status	The link status of the port.
TxPkts	The number of packets transmitted on this port since reset or manual clear.
RxPkts	The number of packets received on this port since reset or manual clear.
Collisions	The number of collisions on this port since reset or manual clear.
Tx B/s	The current transmission (outbound) bandwidth used on the WAN and LAN ports.
Rx B/s	The current reception (inbound) bandwidth used on the WAN and LAN ports.

Table 5-3: Router Statistics Items (continued)

Item	Description
Up Time	The time elapsed since this port acquired the link.
Poll Interval	Specifies the intervals at which the statistics are updated in this window.
Set Interval	Enter a time and click the Set Interval button to set the polling frequency.

Viewing a List of Attached Devices

The Attached Devices menu contains a table of all IP devices that the router has discovered on the local network. From the main menu of the browser interface, under the Maintenance heading, select **Attached Devices** to view the table, shown below.

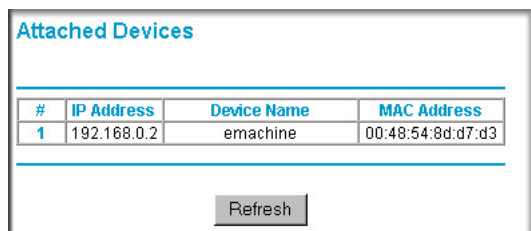


#	IP Address	Device Name	MAC Address
1	192.168.0.2	emachine	00:48:54:8d:d7:d3

Refresh

Figure 5-4

For each device, the table shows the IP address, NetBIOS Host Name or Device Name (if available), and Ethernet MAC address. To force the router to look for attached devices, click the **Refresh** button.

	Note: If the router is rebooted, the table data is lost until the router rediscovers the devices.
---	--

Configuration File Management

The configuration settings of the WNR834B router are stored within the router in a configuration file. This file can be saved (backed up) to a user's PC, retrieved (restored) from the user's PC, or cleared to factory default settings.

From the main menu of the browser interface, under the Maintenance heading, select the **Backup Settings** heading to bring up the menu shown below.

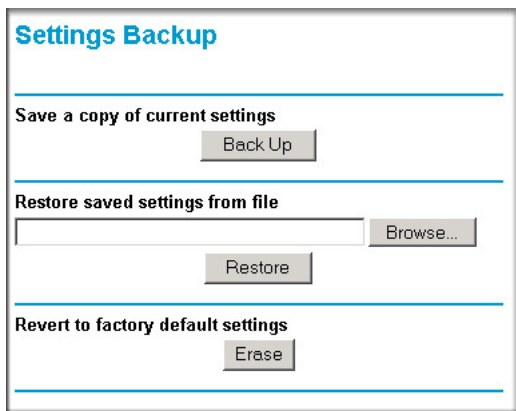


Figure 5-5

Three options are available, and are described in the following sections.

Backing Up and Restoring the Configuration

The Restore and Backup options in the Settings Backup menu allow you to save and retrieve a file containing your router's configuration settings.

To save your settings, click the **Back Up** button. Your browser will extract the configuration file from the router and will prompt you for a location on your computer to store the file. You can give the file a meaningful name at this time, such as pacbell.cfg.

To restore your settings from a saved configuration file, enter the full path to the file on your computer or click the **Browse** button to browse to the file. When you have located it, click the **Restore** button to send the file to the router. The router will then reboot automatically.



Warning: Do not interrupt the reboot process.

Erasing the Configuration

It is sometimes desirable to restore the router to the original default settings. This can be done using the Erase function, which restores all factory settings. After an erase, the router's username is **admin**, the password is **password**, the LAN IP address is `www.routerlogin.net`, and the router's DHCP server is enabled.

To erase the configuration, click the **Erase** button.

To restore the factory default configuration settings without knowing the login password or IP address, you must use the Default Reset button on the rear panel of the router. See [“Restoring the Default Configuration and Password”](#) on page 7-8.

Upgrading the Router Software



Tip: To ensure you are always using the latest firmware, enable the Firmware Upgrade Assistant feature so that the router will automatically detect a new version of the firmware on the Internet and alert you to its availability.

This screen appears at login unless you check Do Not Display This Message Again and click **Yes**.

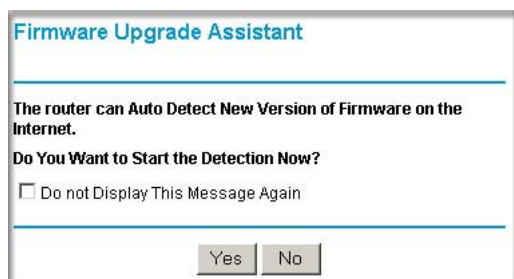


Figure 5-6




Tip: Before upgrading the router software, use the router backup menu to save your configuration settings. A router upgrade may revert the router settings back to the factory defaults. If so, after completing the upgrade, you can restore your settings from the backup.

The routing software of the WNR834B router is stored in FLASH memory, and can be upgraded as new software is released by NETGEAR. Upgrade files can be downloaded from the NETGEAR Web site. If the upgrade file is compressed (.ZIP file), you must first extract the file before sending it to the router. The upgrade file can be sent to the router using your browser.



Note: The Web browser used to upload new firmware into the WNR834B router must support HTTP uploads. NETGEAR recommends using Microsoft Internet Explorer or Netscape Navigator 3.0 or above.

From the main menu of the browser interface, under the Maintenance heading, select the **Router Upgrade** link to display the menu shown below.

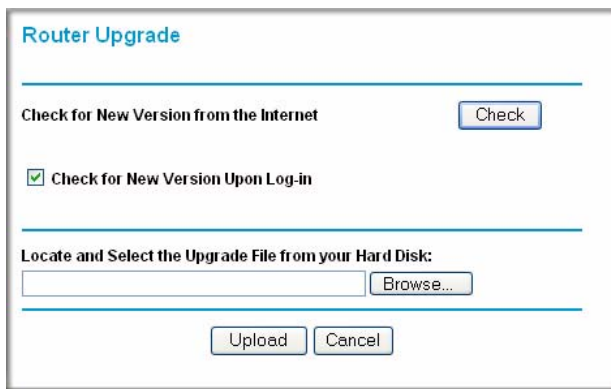

The screenshot shows a web interface titled "Router Upgrade". It features a "Check for New Version from the Internet" section with a "Check" button. Below this is a checked checkbox for "Check for New Version Upon Log-in". The next section is "Locate and Select the Upgrade File from your Hard Disk:", which includes a text input field and a "Browse..." button. At the bottom, there are "Upload" and "Cancel" buttons.

Figure 5-7

To upload new firmware:

1. Click the **Check** button to download and unzip (if the download file is a .zip file) the new software file from NETGEAR.
2. Click the **Browse** button and browse to the location of the upgrade file.
3. Click **Upload**.



Warning: When uploading software to the WNR834B router, it is important not to interrupt the Web browser by closing the window, clicking a link, or loading a new page. If the browser is interrupted, it may corrupt the software. When the upload is complete, your router will automatically restart. The upgrade process typically takes about one minute.

In some cases, you may need to reconfigure the router after upgrading.

Changing the Administrator Password



Tip: Before changing the router password, use the router backup utility to save your configuration settings. If after changing the password, you forget the new password you assigned, you will have to reset the router back to the factory defaults to be able to log in using the default password of **password**. This means you will have to restore all the router configuration settings. If you ever have to reset the router back to the factory defaults, you can restore your settings from the backup.

The default password for the router's Web Configuration Manager is **password**. NETGEAR recommends that you change this password to a more secure password.

From the main menu of the browser interface, under the Maintenance heading, select Set Password to bring up the menu shown below.

Set Password

Old Password

New Password

Repeat New Password

Apply Cancel

Figure 5-8

To change the password, first enter the old password, then enter the new password twice. Click **Apply**.

Chapter 6

Advanced Configuration of the Router

This chapter describes how to configure the advanced features of your RangeMax NEXT Wireless Router WNR834B. These features can be found under the Advanced heading in the main menu of the browser interface.



Note: If you are unfamiliar with networking and routing, see [“Wireless Communications” in Appendix B](#), to become more familiar with the terms and procedures used in this chapter.

Configuring Advanced Wireless Settings

Click on **Wireless Settings** under the Advanced Heading in the main menu to display the Advanced Wireless Settings screen:

Advanced Wireless Settings

Wireless Router Settings

- Enable Wireless Router Radio
- Enable SSID Broadcast
- Enable Frame Burst

Fragmentation Threshold (256 - 2346):

CTS/RTS Threshold (256 - 2346):

Preamble Mode:

Wireless Card Access List

Figure 6-1



Warning: The Wireless Router is already configured with the optimum settings. Do not alter these settings unless directed by NETGEAR support. Incorrect settings may disable the Wireless Router unexpectedly.

Program the advanced wireless settings as follows:

- **Enable Wireless Router Radio**—the Wireless Router Radio of this router can be enabled or disabled to allow wireless access. The wireless icon on the front of the router displays the current status of the Wireless Router Radio to let you know if it is disabled or enabled. If enabled, wireless stations will be able to access the Internet. If disabled, wireless stations will not be able to access the Internet.
- **Enable SSID Broadcast**—if enabled, the Wireless Router SSID will broadcast its name (SSID) to all Wireless Stations. Stations which have no SSID (or a "null" value) can then adopt the correct SSID for connections to this Access Point.
- **Automatically switch channels to avoid interference.** If enabled, the WNR834B router will periodically survey the wireless environment to ensure that it is using the clearest channel. If a clearer channel is available, it may automatically switch channels.



Note: After the router switches channels, there may be a slight delay while your wireless computers reconnect to the router. If you want to avoid this possibility, leave this checkbox unselected.

- **Fragmentation Threshold, CTS/RTS Threshold, Preamble Mode**—these settings are reserved for wireless testing and advanced configuration only. Do not change these settings.
- **Wireless Card Access List**—by default, any wireless computer that is configured with the correct SSID will be allowed access to your wireless network. For increased security, you can restrict access to the wireless network to only allow specific computers based on their MAC addresses.

Wireless Card Access List

The Wireless Card Access Setup page displays a list of wireless computers that are allowed to connect to the router based on their MAC addresses. These wireless computers must also have the correct SSID and WEP settings configured on the Wireless Settings page to access the wireless network.

From the Advanced Wireless Settings menu, click the **Setup Access List** button to display the Wireless Access List menu:

Figure 6-2

Program the wireless card access list as follows:

1. Turn access control on:
 - a. Click the **Turn Access Control On** check box to enable the restricting of wireless computers by their MAC addresses.
 - b. Click the **Apply** button to save changes and return to the Wireless Settings page.

	Note: If Turn Access Control On is enabled and the Access Control List is blank; then no wireless computers will be able to connect to your wireless network.
--	--

2. Set Up The Access Control List:
 - a. Click the **Add** button to go to the Access Setup menu (see [Figure 6-3](#)). This menu displays a list of currently active wireless cards and their Ethernet MAC addresses.
 - b. If the desired computer appears in the list, you can click the radio button of that computer to capture its MAC address; otherwise, you can manually enter the MAC address of the authorized computer. The MAC address can usually be found on the bottom of the wireless device.

- c. If no Device Name appears, you can type a descriptive name for the computer that you are adding.
- d. When you have finished entering the MAC address, return to the Wireless Access List menu by clicking the **Add** button.
- e. Repeat steps a - d for each wireless computer.
- f. Click the **Turn Access Control On** box to enable Access Control.
- g. Click the **Apply** button to save changes and return to the Wireless Settings page.

Wireless Card Access Setup

The Wireless Card Access Setup screen is invoked by clicking **Add** on the Wireless Card Access List menu (see [“Wireless Card Access List”](#) on page 6-3):

Available Wireless Cards	
Device Name	MAC Address

Wireless Card Entry

Device Name:

MAC Address:

Figure 6-3

Program the Wireless Card Access Setup menu as follows:

- **Available Wireless Cards**—the Available Wireless Cards list displays any available wireless computers and their MAC addresses.

If the wireless computer appears in the Available Wireless Cards list, you can click on the radio button of that computer to capture its MAC address. If your wireless computer is not displayed, make sure that the computer is configured correctly, and then click on the **Refresh** button to update the available list of wireless computers. If the wireless computer is still not displayed, then follow the instructions below on how to manually setup the wireless computer's MAC address.

- **Wireless Card Entry**—if no wireless computers appear in the Available Wireless Cards list, you can manually enter the Device Name and MAC address of the authorized wireless computer.



Note: The MAC address is a twelve character key containing the characters 0-9, A-F only and separated by colons (for example., 00:09:AB:CD:EF:01) that can usually be found on the bottom of the wireless device.

Configuring Port Triggering and Port Forwarding

Port Triggering is an advanced feature that can be used to easily enable gaming and other Internet applications. Port Forwarding is typically used to enable similar functionality, but it is static and has some limitations.



Note: If you use applications such as multi-player gaming, peer-to-peer connections, real time communications such as instant messaging, or remote assistance (a feature in Windows XP), you should also enable UPnP according to the instructions at [“Using Universal Plug and Play \(UPnP\)” on page 6-22](#).

Port Triggering opens an incoming port temporarily and does not require the server on the Internet to track your IP address if it is changed by DHCP, for example.

Port Triggering monitors outbound traffic. When the router detects traffic on the specified outbound port, it remembers the IP address of the computer that sent the data and triggers the incoming port. Incoming traffic on the triggered port is then forwarded to the triggering computer.

Using the Port Triggering page, you can make local computers or servers available to the Internet for different services (for example, FTP or HTTP), to play Internet games (like Quake III), or to use Internet applications (like CUseeMe).

Port forwarding is designed for FTP, Web Server or other server-based services. Once port forwarding is set up, requests from the Internet will be forwarded to the proper server. Port triggering will only allow requests from the Internet after a designated port is 'triggered'. Port triggering applies to chat and Internet games.

Port Forwarding / Port Triggering

Please select the service type

Port Forwarding

Port Triggering

Disable Port Triggering

Port Triggering Timeout (in minutes)

Port Triggering Portmap Table

#	Enable	Service Name	Service Type	Inbound Connection	Service User
<input type="radio"/> 1	<input checked="" type="checkbox"/>	dialpad_1	TCP:51200	TCP/UDP:51200	ANY
<input type="radio"/> 2	<input checked="" type="checkbox"/>	dialpad_2	TCP:51201	TCP/UDP:51201	ANY
<input type="radio"/> 3	<input checked="" type="checkbox"/>	paltalk_1	TCP:2090	TCP/UDP:2090	ANY
<input type="radio"/> 4	<input checked="" type="checkbox"/>	paltalk_2	TCP:2091	TCP/UDP:2091	ANY
<input type="radio"/> 5	<input checked="" type="checkbox"/>	quicktime	TCP:554	TCP/UDP:6970..6990	ANY
<input type="radio"/> 6	<input checked="" type="checkbox"/>	starcraft	TCP:6112	TCP/UDP:6112	ANY

Figure 6-4




Note: If the Disable Port Triggering box is checked after configuring port triggering, port triggering is disabled. However, any port triggering configuration information you added to the router is retained even though it will not be used.

- **Port Triggering Timeout**—Enter a value up to 9999 minutes. The Port Triggering Timeout value controls the inactivity timer for the designated inbound port(s). The inbound port(s) close when the inactivity timer expires.
- **For Internet Games or Applications**—Before starting, you need to know which service, application or game you will be configuring. Also, you need to have the outbound port (triggering port) address for this game or application.

Follow these steps to set up a computer to play Internet games or use Internet applications:

1. Select **Port Forwarding / Port Triggering** from the Advanced section of the main menu.
2. Select the service type by clicking the **Port Triggering** radio button. The Port Triggering screen is displayed as shown in [Figure 6-4](#).
3. Click **Add Service**.

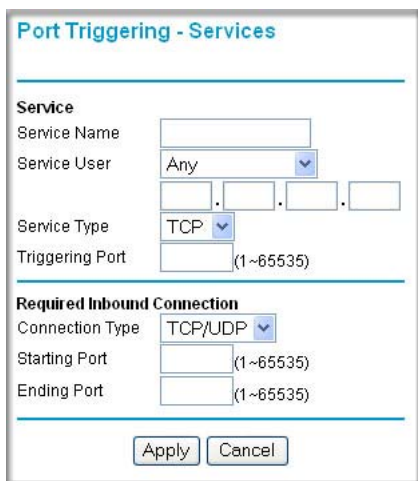

The screenshot shows a web-based configuration window titled "Port Triggering - Services". It is divided into two main sections: "Service" and "Required Inbound Connection".

Service Section:

- Service Name:** A text input field.
- Service User:** A dropdown menu with "Any" selected.
- IP Address:** Four text input fields separated by dots, representing an IP address.
- Service Type:** A dropdown menu with "TCP" selected.
- Triggering Port:** A text input field with a range indicator "(1~65535)".

Required Inbound Connection Section:

- Connection Type:** A dropdown menu with "TCP/UDP" selected.
- Starting Port:** A text input field with a range indicator "(1~65535)".
- Ending Port:** A text input field with a range indicator "(1~65535)".

At the bottom of the window are two buttons: "Apply" and "Cancel".

Figure 6-5

4. Enter a service name in the Service Name box.
5. Under Service User, select **Any** (default) to allow this service to be used by everyone in your network. Otherwise, select **Single address** and enter the IP address of one computer to restrict the service to a particular computer.
6. Select the Service Type.
7. Enter the outbound port number in **Triggering Port** box.
8. Enter the inbound connection port information such as Connection Type, Starting Port and Ending Port boxes. This information can be obtained from the game or applications manual or the product's support Web site.
9. Click **Apply** to save your changes.

Configuring Port Forwarding to Local Servers

Although the router causes your entire local network to appear as a single machine to the Internet, you can make a local server (for example, a Web server or game server) visible and available to the Internet. This is done using the Port Forwarding menu.

Use the Port Forwarding menu to configure the router to forward incoming protocols to computers on your local network. In addition to servers for specific applications, you can also specify a Default DMZ Server to which all other incoming protocols are forwarded. The DMZ Server is configured in the WAN Setup menu as discussed in [“Configuring the WAN Setup Options” on page 6-11](#).

Before starting, you need to determine which type of service, application or game you will provide, and the IP address of the computer that will provide the service. Be sure the computer’s IP address never changes.



Note: To assure that the same computer always has the same IP address, use the reserved IP address feature of your WNR834B router. See [“Using Address Reservation” on page 6-15](#) for instructions on how to use reserved IP addresses.

To configure port forwarding to a local server:

1. From the main menu of the browser interface, under Advanced, click on **Port Forwarding / Port Triggering** to view the port forwarding menu, shown below.

#	Service Name	Start Port	End Port	Server IP Address
	AIM			192.168.1

Figure 6-6

- From the Service Name box, select the service or game that you will host on your network. If the service does not appear in the list, see the following section, [Adding a Custom Service](#).
- Enter the IP address of the local server in the corresponding Server IP Address box.
- Click the **Add** button.

Adding a Custom Service

To define a service, game or application that does not appear in the Service Name list, you must determine what port numbers the service will use. For this information, you may need to contact the manufacturer of the program that you wish to use. When you have the port number information, follow these steps:

- Select **Port Forwarding / Port Triggering** from the Advanced Section of the main menu, as described in the preceding section.
- Click the **Add Custom Service** button.

The screenshot shows a configuration window titled "Ports - Custom Services". It contains the following fields and controls:

- Service Name:** An empty text input field.
- Service Type:** A dropdown menu currently set to "TCP/UDP".
- Starting Port:** A text input field with a placeholder "(1~65534)".
- Ending Port:** A text input field with a placeholder "(1~65534)".
- Server IP Address:** Four separate text input fields containing the values "192", "168", "1", and "5".
- Buttons:** "Apply" and "Cancel" buttons at the bottom.

Figure 6-7

- Type the service name in the Service Name box.
- Type the beginning port number in the Starting Port box.
 - If the application uses only a single port; type the same port number in the Ending Port box.
 - If the application uses a range of ports; type the ending port number of the range in the Ending Port box.
- Type the IP address of the computer in the Server IP Address box.
- Click **Apply** to save your changes.

Editing or Deleting a Port Forwarding Entry

To edit or delete a Port Forwarding entry, follow these steps.

1. In the table, select the button next to the service name.
2. Click the **Edit Service** or **Delete Service** button.

Local Web and FTP Server Example

If a local computer with a private IP address of 192.168.1.33 acts as a Web and FTP server, configure the Ports menu to forward HTTP (port 80) and FTP (port 21) to local address 192.168.1.33

In order for a remote user to access this server from the Internet, the remote user must know the IP address that has been assigned by your ISP. If this address is 172.16.1.23, for example, an Internet user can access your Web server by directing the browser to <http://172.16.1.23>. The assigned IP address can be found in the Router Status Menu, where it is shown as the WAN IP Address.

Some considerations for this application are:

- If your account's IP address is assigned dynamically by your ISP, the IP address may change periodically as the DHCP lease expires.
- If the IP address of the local computer is assigned by DHCP, it may change when the computer is rebooted. To avoid this, you can manually configure the computer to use a fixed address.
- Local computers must access the local server using the computers' local LAN address (192.168.1.33 in this example). Attempts by local computers to access the server using the external IP address (172.16.1.23 in this example) will fail.

Multiple Computers for Internet Gaming

To set up an additional computer to play Age of Empire or Quake III:


1. Click the button of an unused port in the table.
2. Select the game again from the Services/Games list.
3. Change the beginning port number in the Start Port box.
For these games, use the supplied number in the default list and add +1 for each additional computer. For example, if you have already configured one computer to play Hexen II (using port 26900), the second computer's port number would be 26901, and the third computer would be 26902.
4. Type the same port number in the End Port box that you typed in the Start Port box.

5. Type the IP address of the additional computer in the Server IP Address box.
6. Click **Apply**.

Some online games and videoconferencing applications are incompatible with NAT. The WNR834B router is programmed to recognize some of these applications and to work properly with them, but there are other applications that may not function well. In some cases, one local computer can run the application properly if that computer's IP address is entered as the default in the Port Forwarding / Port Triggering Menu. If one local computer acts as a game or videoconferencing host, enter its IP address as the default.

Configuring the WAN Setup Options

The WAN Setup options let you configure a DMZ server, change the MTU size and enable the wireless router to respond to a Ping on the WAN port. These options are discussed below.

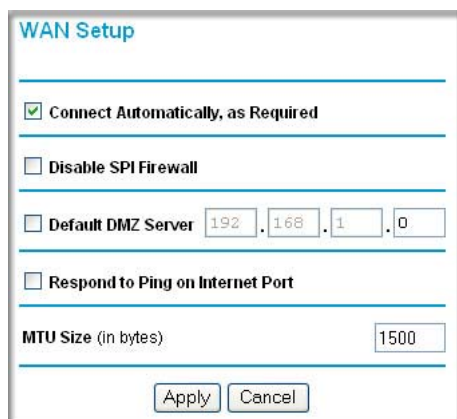

The screenshot shows the WAN Setup configuration interface. It includes the following elements:

- Connect Automatically, as Required:** A checked checkbox.
- Disable SPI Firewall:** An unchecked checkbox.
- Default DMZ Server:** An unchecked checkbox followed by four input fields containing the IP address 192.168.1.0.
- Respond to Ping on Internet Port:** An unchecked checkbox.
- MTU Size (in bytes):** A text input field containing the value 1500.
- Buttons:** 'Apply' and 'Cancel' buttons at the bottom.

Figure 6-8

Connecting Automatically, as Required

Normally, this option should be checked to enable it. An Internet connection will be made automatically after each timeout, whenever Internet-bound traffic is detected. This provides connection on demand and is potentially cost-saving, in some regions of Europe for example, where Internet services charge by the minute.

If disabled, you must connect manually, using the “Connection Status” button on the Router Status screen. This manual connection will stay up all the time without timeouts.

Disabling the SPI Firewall

The SPI (Stateful Inspection) Firewall protects your LAN against Denial of Service attacks. This should only be disabled in special circumstances.

Setting Up a Default DMZ Server

The default DMZ server feature is helpful when using some online games and videoconferencing applications that are incompatible with NAT. The router is programmed to recognize some of these applications and to work properly with them, but there are other applications that may not function well. In some cases, one local computer can run the application properly if that computer's IP address is entered as the default DMZ server.



Note: DMZ servers pose a security risk. A computer designated as the default DMZ server loses much of the protection of the firewall, and is exposed to exploits from the Internet. If compromised, the DMZ server can be used to attack your network.

Incoming traffic from the Internet is normally discarded by the router unless the traffic is a response to one of your local computers or a service that you have configured in the Port Forwarding / Port Triggering menu. Instead of discarding this traffic, you can have it forwarded to one computer on your network. This computer is called the Default DMZ Server.

The WAN Setup menu lets you configure a Default DMZ Server.

To assign a computer or server to be a Default DMZ server, follow these steps:

1. Click **WAN Setup** link in the Advanced section of the main menu.
2. Type the IP address for that server. To remove the default DMZ server, replace the IP address numbers with all zeros.
3. Click **Apply**.

Responding to a Ping on the Internet WAN Port

If you want the router to respond to a 'ping' from the Internet, click the **Respond to Ping on Internet WAN Port** check box. This should only be used as a diagnostic tool, since it allows your router to be discovered. Do not check this box unless you have a specific reason to do so.

Setting the MTU Size

The normal MTU (Maximum Transmit Unit) value for most Ethernet networks is 1500 Bytes, 1492 Bytes for PPPoE connections, or 1436 for PPTP connections. For some ISPs you may need to reduce the MTU. But this is rarely required, and should not be done unless you are sure it is necessary for your ISP connection.

Any packets sent through the router that are larger than the configured MTU size are repackaged into smaller packets to meet the MTU requirement. To change the MTU size:

1. Under MTU Size, enter a new size between 64 and 1500.
2. Click **Apply** to save the new configuration.

Using the LAN IP Setup Options

Another category under the Advanced heading is LAN IP Setup. This menu allows configuration of LAN IP services such as DHCP and RIP. From the main menu of the browser interface, under Advanced, click on **LAN IP Setup** to view the LAN IP Setup menu, shown below.

LAN IP Setup

LAN TCP/IP Setup

IP Address: 192 . 168 . 1 . 1

IP Subnet Mask: 255 . 255 . 255 . 0

RIP Direction: None

RIP Version: Disabled

Use Router as DHCP Server

Starting IP Address: 192 . 168 . 1 . 2

Ending IP Address: 192 . 168 . 1 . 254

Address Reservation

#	IP Address	Device Name	Mac Address
---	------------	-------------	-------------

Add Edit Delete

Apply Cancel

Figure 6-9

Configuring LAN TCP/IP Setup Parameters

The router is shipped preconfigured to use private IP addresses on the LAN side, and to act as a DHCP server. The router's default LAN IP configuration is:

- LAN IP address—192.168.1.1
- Subnet mask—255.255.255.0

These addresses are part of the IETF-designated private address range for use in private networks, and should be suitable for most applications. If your network has a requirement to use a different IP addressing scheme, you can make those changes in this menu.

The LAN IP parameters are:

- IP Address
This is the LAN IP address of the router.
- IP Subnet Mask
This is the LAN Subnet Mask of the router. Combined with the IP address, the IP Subnet Mask allows a device to know which other addresses are local to it, and which must be reached through a gateway or router.
- RIP Direction
RIP (Router Information Protocol) allows a router to exchange routing information with other routers. The RIP Direction selection controls how the router sends and receives RIP packets. Both is the default.
 - When set to Both or Out Only, the router broadcasts its routing table periodically.
 - When set to Both or In Only, the router incorporates the RIP information that it receives.
 - When set to None, the router does not send any RIP packets and ignores any RIP packets received.
- RIP Version
This controls the format and the broadcasting method of the RIP packets that the router sends. (It recognizes both formats when receiving.) By default, this is set for RIP-1.
 - RIP-1 is universally supported. RIP-1 is probably adequate for most networks, unless you have an unusual network setup.
 - RIP-2 carries more information. RIP-2B uses subnet broadcasting.



Note: If you change the LAN IP address of the router while connected through the browser, you will be disconnected. You must then open a new connection to the new IP address and log in again.

Using the Router as a DHCP server

By default, the router functions as a DHCP (Dynamic Host Configuration Protocol) server, allowing it to assign IP, DNS server, and default gateway addresses to all computers connected to the router's LAN. The assigned default gateway address is the LAN address of the router. The router assigns IP addresses to the attached computers from a pool of addresses specified in this menu. Each pool address is tested before it is assigned to avoid duplicate addresses on the LAN.

For most applications, the default DHCP and TCP/IP settings of the router are satisfactory. See [“Wireless Communications” in Appendix B](#) for an explanation of DHCP and information about how to assign IP addresses for your network.

Specify the pool of IP addresses to be assigned by setting the Starting IP Address and Ending IP Address. These addresses should be part of the same IP address subnet as the router's LAN IP address. Using the default addressing scheme, you should define a range between 192.168.1.2 and 192.168.1.254, although you may wish to save part of the range for devices with fixed addresses.

The router delivers the following parameters to any LAN device that requests DHCP:

- An IP Address from the range you have defined
- Subnet Mask
- Gateway IP Address (the router's LAN IP address)
- Primary DNS Server (if you entered a Primary DNS address in the Basic Settings menu; otherwise, the router's LAN IP address)
- Secondary DNS Server (if you entered a Secondary DNS address in the Basic Settings menu)

To select another device on your network as the DHCP server, or to manually configure the network settings of all of your computers, clear the **Use Router as DHCP Server** check box. Otherwise, leave it checked.

Using Address Reservation

When you specify a reserved IP address for a computer on the LAN, that computer will always receive the same IP address each time it accesses the router's DHCP server. Reserved IP addresses should be assigned to computers or servers that require permanent IP settings.

To reserve an IP address:

1. Click the **Add** button.
2. In the IP Address box, type the IP address to assign to the computer or server.
(choose an IP address from the router's LAN subnet, such as 192.168.1.x)

3. Type the MAC Address of the computer or server.



Tip: If the computer is already present on your network, you can copy its MAC address from the Attached Devices menu and paste it here.

4. Click **Apply** to enter the reserved address into the table.



Note: The reserved address is not assigned until the next time the computer contacts the router's DHCP server. Reboot the computer or access its IP configuration and force a DHCP release and renew.

To edit or delete a reserved address entry:

1. Click the button next to the reserved address you want to edit or delete.
2. Click **Edit** or **Delete**.

Using a Dynamic DNS Service

If your network has a permanently assigned IP address, you can register a domain name and have that name linked with your IP address by public Domain Name Servers (DNS). However, if your Internet account uses a dynamically assigned IP address, you do not know in advance what your IP address will be, and the address can change frequently. In this case, you can use a commercial dynamic DNS service, which will allow you to register your domain to their IP address, and will forward traffic directed at your domain to your frequently-changing IP address.



Note: If your ISP assigns a private WAN IP address (such as 192.168.x.x or 10.x.x.x), the dynamic DNS service will not work because private addresses are not routed on the Internet.

The router contains a client that can connect to many popular dynamic DNS services. You can select one of these services and obtain an account with them. Then, whenever your ISP-assigned IP address changes, your router will automatically contact your dynamic DNS service provider, log in to your account, and register your new IP address.

From the main menu of the browser interface, under Advanced, click on **Dynamic DNS**.



The screenshot shows the 'Dynamic DNS' configuration page. At the top, there is a title 'Dynamic DNS' in blue. Below the title is a horizontal line. Underneath, there is a checkbox labeled 'Use a Dynamic DNS Service'. Below this is another horizontal line. The 'Service Provider' is set to 'www.DynDNS.org' in a dropdown menu. Below this are three text input fields: 'Host Name', 'User Name', and 'Password'. Below these fields is another horizontal line. At the bottom, there is a checkbox labeled 'Use Wildcards'. At the very bottom, there are three buttons: 'Apply', 'Cancel', and 'Show Status'.

Figure 6-10

To configure Dynamic DNS:

1. Register for an account with one of the dynamic DNS service providers whose names appear in the **Select Service Provider** box. For example, for dyndns.org, go to **www.dyndns.org**.
2. Select the **Use a Dynamic DNS Service** check box.
3. Select the name of your dynamic DNS Service Provider.
4. Type the Host Name (or domain name) that your dynamic DNS service provider gave you.
5. Type the User Name for your dynamic DNS account.
6. Type the Password (or key) for your dynamic DNS account.
7. If your dynamic DNS provider allows the use of wildcards in resolving your URL, you may select the **Use wildcards** check box to activate this feature.
For example, the wildcard feature will cause *.yourhost.dyndns.org to be aliased to the same IP address as yourhost.dyndns.org.
8. Click **Apply** to save your configuration.

Configuring Static Routes

Static Routes provide additional routing information to your router. Under normal circumstances, the router has adequate routing information after it has been configured for Internet access, and you do not need to configure additional static routes. You must configure static routes only for unusual cases such as multiple routers or multiple IP subnets located on your network.

From the main menu of the browser interface, under Advanced, click on **Static Routes** to view the Static Routes menu, shown below.

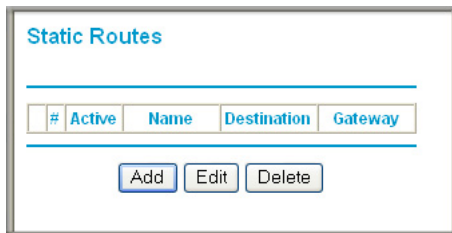


Figure 6-11

To add or edit a Static Route:

1. Click the **Add** button to open the Add/Edit Menu, shown below.

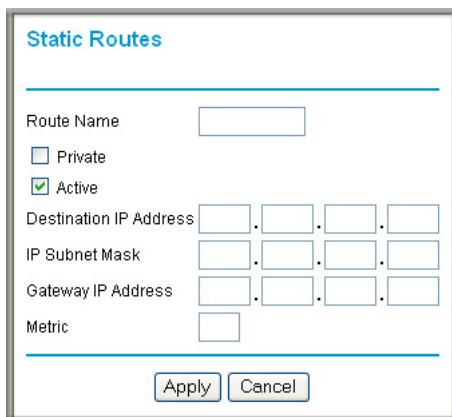


Figure 6-12

2. Type a route name for this static route in the Route Name box. (This is for identification purposes only.)

3. Select **Private** if you want to limit access to the LAN only. The static route will not be reported in RIP.
4. Select **Active** to make this route effective.
5. Type the Destination IP Address of the final destination.
6. Type the IP Subnet Mask for this destination.
If the destination is a single host, type 255.255.255.255.
7. Type the Gateway IP Address, which must be a router on the same LAN segment as the WNR834B.
8. Type a number between 1 and 15 as the Metric value.
This represents the number of routers between your network and the destination. Usually, a setting of 2 or 3 works, but if this is a direct connection, set it to 1.
9. Click **Apply** to have the static route entered into the table.

As an example of when a static route is needed, consider the following case:

- Your primary Internet access is through a cable modem to an ISP.
- You have an ISDN router on your home network for connecting to the company where you are employed. This router's address on your LAN is 192.168.1.100.
- Your company's network address is 134.177.0.0.

When you first configured your router, two implicit static routes were created. A default route was created with your ISP as the gateway, and a second static route was created to your local network for all 192.168.1.x addresses. With this configuration, if you attempt to access a device on the 134.177.0.0 network, your router will forward your request to the ISP. The ISP forwards your request to the company where you are employed, and the request will likely be denied by the company's firewall.

In this case you must define a static route, telling your router that 134.177.0.0 should be accessed through the ISDN router at 192.168.1.100. The static route would look like [Figure 6-12](#).

In this example:

- The Destination IP Address and IP Subnet Mask fields specify that this static route applies to all 134.177.x.x addresses.
- The Gateway IP Address fields specifies that all traffic for these addresses should be forwarded to the ISDN router at 192.168.1.100.
- A Metric value of 1 will work since the ISDN router is on the LAN.
- Private is selected only as a precautionary security measure in case RIP is activated.

Enabling Remote Management Access

Using the Remote Management page, you can allow a user or users on the Internet to configure, upgrade and check the status of your WNR834B router.

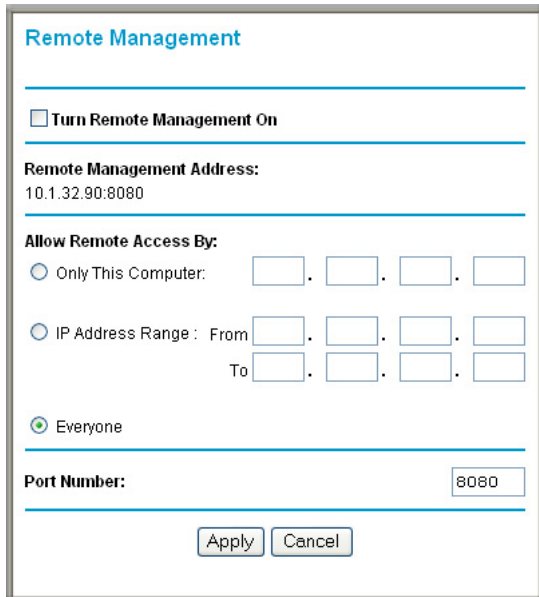


Figure 6-13



Note: Be sure to change the router's default configuration password to a very secure password. The ideal password should contain no dictionary words from any language, and should be a mixture of letters (both upper and lower case), numbers, and symbols. Your password can be up to 30 characters.

To configure your router for Remote Management:

1. Select the **Turn Remote Management On** check box.
2. Specify what external addresses will be allowed to access the router's remote management.



Note: For enhanced security, restrict access to as few external IP addresses as practical.

- a. To allow access from any IP address on the Internet, select **Everyone**.
 - b. To allow access from a range of IP addresses on the Internet, select **IP address range**. Enter a beginning and ending IP address to define the allowed range.
 - c. To allow access from a single IP address on the Internet, select **Only this computer**. Enter the IP address that will be allowed access.
3. Specify the Port Number for accessing the management interface.

Web browser access normally uses the standard HTTP service port 80. For greater security, enter a custom port number for the remote management Web interface. Choose a number between 1024 and 65535, but do not use the number of any common service port. The default is 8080, which is a common alternate for HTTP.

4. Click **Apply** to have your changes take effect.



Note: When accessing your router from the Internet, type your router's WAN IP address into your browser's Address (in Internet Explorer) or Location (in Netscape) box, followed by a colon (:) and the custom port number. For example, if your external address is 134.177.0.123 and you use port number 8080, then enter `http://134.177.0.123:8080` in your browser.

Using Universal Plug and Play (UPnP)

Universal Plug and Play (UPnP) helps devices, such as Internet appliances and computers, access the network and connect to other devices as needed. UPnP devices can automatically discover the services from other registered UPnP devices on the network.

UPnP

Turn UPnP On

Advertisement Period (in minutes)

Advertisement Time To Live (in hops)

UPnP Portmap Table

Active	Protocol	Int. Port	Ext. Port	IP Address
Yes	TCP	9198	11913	192.168.0.2
Yes	UDP	5339	7102	192.168.0.2

Figure 6-14

From the main menu of the browser interface, under Advanced, click on **UPnP**. Set up UPnP according to the guidelines below.

Turn UPnP On—UPnP can be enabled or disabled for automatic device configuration. The default setting for UPnP is disabled. If disabled, the router will not allow any device to automatically control the resources, such as port forwarding (mapping) of the router.



Note: If you use applications such as multi-player gaming, peer-to-peer connections, real time communications such as instant messaging, or remote assistance (a feature in Windows XP), you should enable UPnP.

Advertisement Period—the Advertisement Period is how often the router will broadcast its UPnP information. This value can range from 1 to 1440 minutes. The default period is 30 minutes. Shorter durations ensure that control points have current device status at the expense of additional network traffic. Longer durations may compromise the freshness of the device status but can significantly reduce network traffic.

Advertisement Time To Live—the time to live for the advertisement is measured in hops (steps) for each UPnP packet sent. The time to live hop count is the number of steps a broadcast packet is allowed to propagate for each UPnP advertisement before it disappears. The number of hops can range from 1 to 255. The default value for the advertisement time to live is 4 hops, which should be fine for most home networks. If you notice that some devices are not being updated or reached correctly, then it may be necessary to increase this value a little.

UPnP Portmap Table—the UPnP Portmap Table displays the IP address of each UPnP device that is currently accessing the router and which ports (Internal and External) that device has opened. The UPnP Portmap Table also displays what type of port is open and if that port is still active for each IP address.

Chapter 7

Troubleshooting

This chapter gives information about troubleshooting your RangeMax NEXT Wireless Router WNR834B. After each problem description, instructions are provided to help you diagnose and solve the problem.

Troubleshooting Quick Tips

Here are some tips for correcting simple problems you may have:

Be sure to restart your network in this sequence

- 1) Turn off *and* unplug the modem. Then turn off the wireless router, and computer.
- 2) Plug in the modem and turn it on. Wait two minutes.
- 3) Turn on the wireless router and wait 1 minute.
- 4) Turn on the computers.

Make sure the Ethernet cables are securely plugged in

- The Internet status light on the wireless router will be lit if the Ethernet cable to the wireless router from the modem is plugged in securely and the modem and wireless router are turned on.
- For each powered on computer connected to the wireless router with a securely plugged in Ethernet cable, the corresponding wireless router LAN port status light will be lit. The label on the bottom of the wireless router identifies the number of each LAN port.

Make sure the wireless settings in the computer and router match exactly.

The Wireless Network Name (SSID) and WEP or WPA security settings of the router and wireless computer must match exactly.

Make sure the network settings of the computer are correct.


- LAN and wirelessly connected computers *must* be configured to obtain an IP address automatically via DHCP. Please see [“Preparing a Computer for Network Access” in Appendix B](#) or the documentation that came with your computer for help with this.
- Some cable modem ISPs require you to use the MAC address of the computer registered on the account. If so, in the Router MAC Address section of the Basic Settings menu, select **Use this Computer’s MAC Address**. The router will then capture and use the MAC address of the computer that you are now using. You must be using the computer that is registered with the ISP. Click **Apply** to save your settings. Restart the network in the correct sequence.

Check the router status lights to verify correct router operation.

- If the Power light does not turn solid blue and the Test light does not turn off within 2 minutes after turning the router on, reset the router according to the instructions in [“Restoring the Default Configuration and Password” on page 7-8](#).
- If the Wireless light does not come on, verify that the wireless feature is turned on according to the instructions in [“Understanding Wireless Settings” on page 3-6](#).

Basic Functioning

After you turn on power to the router, the following sequence of events should occur:

1. When power is first applied, verify that the Power light  is on.
2. After approximately 10 seconds, verify that:
 - a. The power light is solid green.
 - b. The LAN port lights are lit for any local ports that are connected.
 - c. The Internet port light is lit.
 - d. A port light is lit, to indicate a link has been established to the connected device. If a LAN port is connected to a 100 Mbps device, verify that the port’s light is green. If the port is connected to a 10 Mbps device, the light is amber.

If any of the above conditions does not occur, see the appropriate following section.

Power Light Not On

If the Power and other lights are off when your router is turned on:

- Make sure that the power cord is properly connected to your router and that the power supply adapter is properly connected to a functioning power outlet.
- Check that you are using the 12V DC 1A power adapter that NETGEAR supplies for this product.

If the error persists, you have a hardware problem and should contact technical support.

Lights Never Turn Off

When the router is turned on, the lights turn on for about 10 seconds and then turn off. If all the lights stay on, there is a fault within the router.

If all lights are still on one minute after power up:

- Cycle the power to see if the router recovers.
- Clear the router's configuration to factory defaults. This sets the router's IP address to 192.168.1.1. The procedure is explained in [“Restoring the Default Configuration and Password” on page 7-8](#).

If the error persists, you might have a hardware problem and should contact technical support.

LAN or WAN Port Lights Not On

If either the LAN lights or Internet light do not light when the Ethernet connection is made, check the following:

- Make sure that the Ethernet cable connections are secure at the router and at the hub or workstation.
- Make sure that power is turned on to the connected hub or workstation.
- Be sure you are using the correct cable:
 - When connecting the router's Internet port to a cable or DSL modem, use the cable that was supplied with the cable or DSL modem. This cable could be a standard straight-through Ethernet cable or an Ethernet crossover cable.

Troubleshooting the Web Configuration Interface

If you are unable to access the router's Web Configuration interface from a computer on your local network, check the following:

- Check the Ethernet connection between the computer and the router as described in the previous section.
- Make sure your computer's IP address is on the same subnet as the router. For instructions, see [“Preparing a Computer for Network Access” in Appendix B](#) to configure your computer.



Note: If your computer's IP address is shown as 169.254.x.x: Recent versions of Windows and Mac OS will generate and assign an IP address if the computer cannot reach a DHCP server. These auto-generated addresses are in subnet 169.254.x.x. If your IP address is in this range, check the connection from the computer to the router and reboot your computer.

- Make sure your browser has Java, JavaScript, or ActiveX enabled. If you are using Internet Explorer, click **Refresh** to be sure the Java applet is loaded.
- Try quitting the browser and launching it again.
- Make sure you are using the correct login information. The factory default login name is **admin** and the password is **password**. Make sure that CAPS LOCK is off when entering this information.

If the router does not save changes you have made in the Web Configuration Interface, check the following:

- When entering configuration settings, be sure to click the **Apply** button before moving to another menu or tab, or your changes are lost.
- Click the **Refresh** or **Reload** button in the Web browser. The changes may have occurred, but the Web browser may be caching the old configuration.

Troubleshooting the ISP Connection

If your router is unable to access the Internet, you should first determine whether the router is able to obtain a WAN IP address from the ISP. Unless you have been assigned a static IP address, your router must request an IP address from the ISP. You can determine whether the request was successful using the Web Configuration Manager.

To check the WAN IP address:

1. Launch your browser and select an external site such as www.netgear.com
2. Access the main menu of the router's configuration at <http://www.routerlogin.net>.
3. Under the Maintenance heading, select **Router Status**.
4. Check that an IP address is shown for the WAN Port.
If 0.0.0.0 is shown, your router has not obtained an IP address from your ISP.

If your router is unable to obtain an IP address from the ISP, you may need to force your cable or DSL modem to recognize your new router by performing the following procedure:

1. Turn off power to the cable or DSL modem.
2. Turn off power to your router.
3. Wait five minutes and reapply power to the cable or DSL modem.
4. When the modem's lights indicate that it has reacquired sync with the ISP, reapply power to your router.
5. Then restart your computer.

If your router is still unable to obtain an IP address from the ISP, the problem may be one of the following:

- Your ISP may require a login program.
Ask your ISP whether they require PPP over Ethernet (PPPoE) or some other type of login.
- If your ISP requires a login, you may have incorrectly set the login name and password.
- Your ISP may check for your computer's host name.
Assign the computer Host Name of your ISP account as the Account Name in the Basic Settings menu.
- Your ISP only allows one Ethernet MAC address to connect to Internet, and may check for your computer's MAC address. In this case:

Inform your ISP that you have bought a new network device, and ask them to use the router's MAC address.

OR

Configure your router to spoof your computer's MAC address. This can be done in the Basic Settings menu. For more information, see [“How to Bypass the Configuration Assistant” on page 3-8](#).

If your router can obtain an IP address, but your computer is unable to load any Web pages from the Internet:

- Your computer may not recognize any DNS server addresses.

A DNS server is a host on the Internet that translates Internet names (such as www addresses) to numeric IP addresses. Typically your ISP will provide the addresses of one or two DNS servers for your use. If you entered a DNS address during the router's configuration, reboot your computer and verify the DNS address as described in [“Preparing a Computer for Network Access” in Appendix B](#). Alternatively, you may configure your computer manually with DNS addresses, as explained in your operating system documentation.

- Your computer may not have the router configured as its TCP/IP gateway.

If your computer obtains its information from the router by DHCP, reboot the computer and verify the gateway address as described in [“Preparing a Computer for Network Access” in Appendix B](#).

Troubleshooting a TCP/IP Network Using a Ping Utility

Most TCP/IP terminal devices and routers contain a ping utility that sends an echo request packet to the designated device. The device then responds with an echo reply. Troubleshooting a TCP/IP network is made very easy by using the ping utility in your computer or workstation.

Testing the LAN Path to Your Router

You can ping the router from your computer to verify that the LAN path to your router is set up correctly.

To ping the router from a running Windows 95 or later:

1. From the Windows toolbar, click on the **Start** button and select **Run**.
2. In the field provided, type Ping followed by the IP address of the router, as in this example:

```
ping www.routerlogin.net
```

3. Click **OK**.

You should see a message like this one:

```
Pinging <IP address > with 32 bytes of data
```

If the path is working, you see this message:

```
Reply from < IP address >: bytes=32 time=NN ms TTL=xxx
```

If the path is not working, you see this message:

```
Request timed out
```

If the path is not functioning correctly, you could have one of the following problems:

- Wrong physical connections
 - Make sure the LAN port LED is on. If the LED is off, follow the instructions in [“LAN or WAN Port Lights Not On”](#) on page 7-3.
 - Check that the corresponding Link LEDs are on for your network interface card and for the hub ports (if any) that are connected to your workstation and router.
- Wrong network configuration
 - Verify that the Ethernet card driver software and TCP/IP software are both installed and configured on your computer or workstation.
 - Verify that the IP address for your router and your workstation are correct and that the addresses are on the same subnet.

Testing the Path from Your Computer to a Remote Device

After verifying that the LAN path works correctly, test the path from your computer to a remote device. From the Windows run menu, type:

```
PING -n 10 <IP address>
```

where *<IP address>* is the IP address of a remote device such as your ISP's DNS server.

If the path is functioning correctly, replies like those shown in the previous section are displayed. If you do not receive replies:

- Check that your computer has the IP address of your router listed as the default gateway. If the IP configuration of your computer is assigned by DHCP, this information will not be visible in your computer's Network Control Panel. Verify that the IP address of the router is listed as the default gateway as described in [“Preparing a Computer for Network Access”](#) in Appendix B.
- Check to see that the network address of your computer (the portion of the IP address specified by the subnet mask) is different from the network address of the remote device.

- Check that your cable or DSL modem is connected and functioning.
- If your ISP assigned a host name to your computer, enter that host name as the Account Name in the Basic Settings menu.
- Your ISP could be rejecting the Ethernet MAC addresses of all but one of your computers. Many broadband ISPs restrict access by only allowing traffic from the MAC address of your broadband modem, but some ISPs additionally restrict access to the MAC address of a single computer connected to that modem. If this is the case, you must configure your router to “clone” or “spoof” the MAC address from the authorized computer. For more information, see [“How to Bypass the Configuration Assistant” on page 3-8](#).

Restoring the Default Configuration and Password

This section explains how to restore the factory default configuration settings, changing the router’s administration password to **password**. You can erase the current configuration and restore factory defaults in two ways:

- Use the Erase function of the router (see [“Erasing the Configuration” on page 5-6](#)).
- Use the Default Reset button on the rear panel of the router. Use this method for cases when the administration password or IP address is not known.

To restore the factory default configuration settings without knowing the administration password or IP address, you must use the Default Reset button on the rear panel of the router.

1. Press and hold the Default Reset button until the test light blinks on (about 10 seconds).
2. Release the Default Reset button and wait for the router to reboot.

If the wireless router fails to restart or the power light continues to blink or turns solid amber, the unit may be defective. If the error persists, you might have a hardware problem and should contact technical support.

Problems with Date and Time

The E-mail menu in the Content Filtering section displays the current date and time of day. The WNR834B router uses the Network Time Protocol (NTP) to obtain the current time from one of several Network Time Servers on the Internet. Each entry in the log is stamped with the date and time of day. Problems with the date and time function can include:

- Date shown is January 1, 2000. Cause: The router has not yet successfully reached a Network Time Server. Check that your Internet access settings are configured correctly. If you have just completed configuring the router, wait at least five minutes and check the date and time again.
- Time is off by one hour. Cause: The router does not automatically sense Daylight Savings Time. In the E-mail menu, check or clear the box marked “Adjust for Daylight Savings Time”.

Appendix A

Technical Specifications

This appendix provides technical specifications for the wireless router.

Factory Default Settings

You can use the reset button located on the front of your device to reset all settings to their factory defaults. This is called a hard reset.

- To perform a hard reset, push and hold the reset button for approximately 20 seconds (until the Power LED blinks alternating green and amber). Your device will return to the factory configuration settings shown below.
- Pressing the reset button for a shorter period of time will simply cause your device to reboot.

Table A-1. Home Router Default Configuration Settings

Feature		Default Behavior
Router Smart Wizard automatic logon during initial setup		Enabled Note: The Smart Wizard on the NETGEAR CD
Router Login Default Access		
	Router Login URL	http://www.routerlogin.net or http://www.routerlogin.com
	Login Name -- case sensitive printed on product label	admin
	Login Password -- case sensitive printed on product label	password
Internet Connection		
	WAN MAC Address	Use default hardware address
	MTU Size	1500

Table A-1. Home Router Default Configuration Settings

Feature	Default Behavior
Local Network	
Router Lan IP address printed on product label (also known as Gateway IP address)	192.168.1.1
Router Subnet	255.255.255.0
DHCP Server	Enabled
Time Zone	GMT
Time Zone Adjusted for Daylight Saving Time	Disabled
Firewall	
Inbound communications coming in from the Internet	Disabled -- bars all unsolicited requests except for traffic on port 80, the http port
Outbound communications going out to the Internet	Enabled for all
Wireless	
Wireless Communication	Enabled
SSID Name	NETGEAR
Security	Disabled
Broadcast SSID	Enabled
Transmission Speed	Auto*
Country/Region	United States in the US, otherwise varies by region
RF Channel	6 in the US, otherwise 11 until region selected
Operating Mode	g and b, up to 130 Mbps, g only up to 270 Mbps
Data Rate	up to 300 Mbps
Output Power	Full

*.Maximum Wireless signal rate derived from IEEE Standard 802.11 specifications. Actual throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate.

Technical Specifications

Table A-2. Home Router Default Configuration Settings

Feature		Default Behavior
Network Protocol and Standards Compatibility		
	Data and Routing Protocols:	TCP/IP, RIP-1, RIP-2, DHCP, PPPoE, PPTP, Bigpond, Dynamic DNS, and UPnP
Power Adapter		
	North America	120V, 60 Hz, input
	UK, Australia	240V, 50 Hz, input
	Europe	230V, 50 Hz, input
	Japan	100V, 50/60 Hz, input
	Output, all regions:	12 V DC @ 1.0A output
Physical		
	Dimensions	9" x 6.8" x 3" 228.5 x 175 x 76 mm
	Weight	1.1 lbs. 0.5 kg
Environmental		
	Operating temperature	0° to 40° C (32° to 104° F)
	Operating humidity	90% maximum relative humidity, noncondensing
Electromagnetic Emissions		
	Designed to conform to the following standards:	FCC Part 15 Class B; EN 55022/24 (CISPR 22/24) Class B; EN 60950 (CE LVD) Class B; MIC
Interface Specifications		
	LAN	10BASE-T or 100BASE-Tx, RJ-45
	WAN	10BASE-T or 100BASE-Tx, RJ-45

Appendix B

Related Documents

This appendix provides links to reference documents you can use to gain a more complete understanding of the technologies used in your NETGEAR product.

Document	Link
Internet Networking and TCP/IP Addressing	http://documentation.netgear.com/reference/enu/tcpip/index.htm
Wireless Communications	http://documentation.netgear.com/reference/enu/wireless/index.htm
Preparing a Computer for Network Access	http://documentation.netgear.com/reference/enu/wsdhcp/index.htm
Virtual Private Networking (VPN)	http://documentation.netgear.com/reference/enu/vpn/index.htm
Glossary	http://documentation.netgear.com/reference/enu/glossary/index.htm

