



## AVR-X1300W 7.2CH AV SURROUND RECEIVER

# THE FULL-FEATURED HOME CINEMA ENTRY


Experience the latest home cinema audio formats with the AVR-X1300W 7.2 channel Dolby Atmos AV receiver, which delivers breathtaking immersive surround sound with today's advanced movie soundtracks.

### HIGHLIGHTS

- 7.2 channel AV Receiver with 145W per channel
- Built-in WiFi with 2.4GHz/5GHz dual band support; built-in Bluetooth
- 4K/60 Hz full-rate pass-through, 4:4:4 color resolution, HDR and BT.2020
- 6 HDMI inputs (incl. 1 front) with full HDCP 2.2 support
- Dolby Atmos (up to 5.1.2) and DTS:X (via firmware update)
- AirPlay, Bluetooth, Internet Radio, Spotify Connect, Network Audio Streaming
- DSD (2.8/5.6MHz), FLAC, ALAC, AIFF and WAV support
- Audyssey MultEQ XT, Dynamic Volume and Dynamic EQ
- Colour-coded speaker terminals, Setup Assistant, Denon 2016 AVR Remote App
- Intelligent ECO mode with off/on/auto setting

### YOUR BENEFITS

- Enough power to fill medium size rooms with unique Denon sound
- Improved network stability especially in WiFi-crowded homes
- Latest HDMI standard for future-proof compatibility
- Plenty of inputs for your Blu-ray Player, game console and more
- Blockbusting 3D sound with effects from overhead
- Access to almost unlimited online music sources
- High Resolution audio streaming for HiFi enthusiasts even in Gapless
- Delivering perfect equalization for your individual room
- Hassle-free installation, setup and operation
- Energy-conscious without compromising on performance

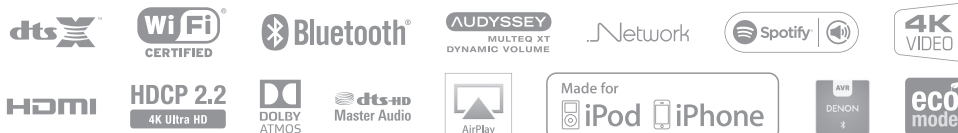

### Powerful 7 Channel Discrete Amplifier with Eco Mode

Featuring high current discrete power output devices on all seven channels, the AVR-X1300W is rated at 145 watts per channel. It's also equipped with high-current low impedance drive capability, for compatibility with the widest range of loudspeaker models (down to 4 ohms). The Eco mode adjusts the power amplifier's output according to the volume level to reduce power consumption, with an on-screen Eco meter providing real-time monitoring of the power-saving.

### Built-in Bluetooth and Wi-Fi

Featuring Bluetooth and Wi-Fi wireless streaming connectivity, the AVR-X1300W is equipped with an advanced dual antenna system for robust and error-free streaming even in congested urban environments. Connected to the Internet through your home Wi-Fi network (or with a hard-wired connection via the RJ-45 Ethernet LAN port), it allows you to enjoy your favorite tracks from streaming music services such as Spotify Connect. You can also choose from thousands of Internet radio stations from around the world, and enjoy music and speech entertainment of virtually every genre. AirPlay lets you play your favourite tracks wirelessly from your iPod touch, iPhone or iPad, and via network streaming you can listen to music files stored on your home PC or Mac, or NAS devices. The all-new Denon 2016 AVR Remote App lets you control the AVR-X1300W with your smartphone or tablet over a network connection: it's available for Apple iOS, Android and for the Kindle Fire.

### Dolby Atmos & DTS:X

Dolby's revolutionary Dolby Atmos technology dispenses with the channel-based surround sound coding used for decades, in favour of advanced object-based coding, giving the sound designer the ability to place sounds precisely anywhere in the three-dimensional soundspace. Now you can enjoy this award-winning technology at home with the AVR-X1300W, which features the ability to connect

a 5.1 surround sound speaker system and 2 additional overhead speakers or 2 additional Dolby Atmos-certified elevation speakers for the ultimate home theater experience.

DTS:X: The latest immersive surround sound system, DTS:X features similar object-based audio coding, and provides for overhead speakers to deliver a stunning surround sound experience. (DTS:X will be enabled via a future firmware update: for more info, please visit [www.denon.com/dtsx](http://www.denon.com/dtsx)).

This includes both Dolby Surround and DTS Neural:X upmixing: users with a '3D' sound speaker set-up are able to get an enhanced surround experience from conventional Dolby- or DTS-encoded content, or even music in stereo, using the full set of speakers installed in the listening room.

### Latest HDMI 2.0a Connectivity; HDCP 2.2 Compatible

The AVR-X1300W's six HDMI inputs, including one conveniently located on the front panel, all conform to the latest HDMI specifications, including 4K Ultra HD 60Hz video, 4:4:4 Pure Color subsampling, High Dynamic Range (HDR) and 21:9 video, 3D, and BT.2020 pass-through support. The advanced video section also features HDCP 2.2 compatibility, a requirement for 4K Ultra HD copy-protected content, ensuring the AVR-X1300W is ready for the next generation of Blu-ray disc players, set-top boxes and other 4K Ultra HD sources.

### High Resolution Audio


Discover the incredible fidelity of high resolution audio tracks with the AVR-X1300W's ability to decode up to 24-bit/192-kHz lossless files (AIFF, FLAC and WAV; ALAC/Apple Lossless to 24-bit/96kHz), as well as DSD 2.8MHz (the audiophile format of SACD) and now 5.6MHz. Play them from memory devices via the front panel USB, or from network sources – the AVR-X1300W will also play lossy file types such as MP3.

### Audyssey Room Correction

As the first AV receiver manufacturer to embrace Audyssey's advanced DSP audio algorithms, Denon brings to the AVR-X1300W the Audyssey Silver suite of DSP functions, which includes MultEQ XT, Dynamic EQ and Dynamic Volume. Audyssey MultEQ XT automatic room acoustic measurement and correction system uses the supplied microphone and a test-tone sequence to match your speakers to your room's acoustics, giving the smoothest, most natural tonal balance. The MultEQ XT system here provides greater filter precision for the main and satellite speakers, with eight times the resolution of the base MultEQ system, at for up to 8 measurement locations to ensure the best sound for the whole family, not just one ideal 'sweet spot'. Audyssey Dynamic EQ uses advanced psychoacoustic algorithms to continually adjust tonal balance to deliver full range sound, even at lower volume levels; Audyssey Dynamic Volume smoothes out those annoying volume jumps – especially from loud commercials – for an easier viewing experience.

### Easy To Setup, Easy To Use

The AVR-X1300W's clear, easy to understand graphical on-screen display guides you through the set-up process to ensure the correct configuration. The exclusive Setup Assistant and the included Quick Start guide together provide easy setup instructions, leading the user step by step to optimise critical settings for the best possible sound and video quality with the rest of your system.

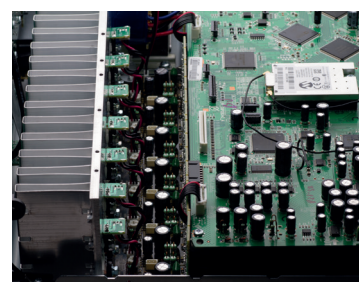

Discrete built amplifier stage

Technical information	
<b>Number of power amps</b>	7 (Front L/R, Center, Surround L/R, Surround Back L/R or Height)
<b>Power output</b>	145 watts per channel (6 ohms, 1 kHz, THD 1%, 1ch driven)
	120 watts per channel (6 ohms, 1 kHz, THD 0.7%, 2ch driven)
	80 watts per channel (8 ohms, 20 Hz - 20 kHz, THD 0.08%, 2ch driven)
<b>Speaker impedance</b>	4 - 16 ohms
<b>Preamplifier section</b>	
Input sensitivity/impedance	200 mV / 47 kohms
Frequency response	10 Hz - 100 kHz — +1, -3 dB (DIRECT mode)
<b>S/N Ratio</b>	98 dB (IHF-A weighted, DIRECT mode)
<b>FM section</b>	
Tuning frequency range	87.5 - 108 MHz
<b>AM section</b>	
Tuning frequency range	522 kHz – 1611 kHz
<b>General</b>	
Power supply	AC 230 V, 50 Hz
Power consumption	430 W (Standby 0.1 W, CEC standby 0.5 W)
Power consumption No-Sound	29 W (ECO on), 39 W (ECO off)
Dimensions (W x H x D)	434 x 151 x 339 mm
Weight	8.5 kg

Ports		
<b>IN</b>	HDMI (Front 1)	x 6
	Composite (video)	x 2
	Analogue Audio	x 2
	Digital Optical	x 2
<b>OUT</b>	USB (front)	x 1
	HDMI Monitor	x 1
	Composite Monitor	x 1
	Audio Preout (SW)	0.2 ch
<b>OTHER</b>	Phones	x 1
	Ethernet	x 1
	Microphone Port	x 1
	FM Tuner Antenna	x 1
	AM Tuner Antenna	x 1

<b>EAN</b>	AVRX1300WBKE2	4951035058077	Black
<b>UK</b>	AVRX1300WBKE2GB	4951035059869	Black

**Denon Europe**  
Beemdstraat 11  
5653 MA Eindhoven  
The Netherlands  
[www.denon.eu](http://www.denon.eu)

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by D&M Holdings Inc. is under license. Dolby, Dolby Atmos, and the double-D symbol are trademarks of Dolby Laboratories. • DTS, the Symbol, DTS in combination with the Symbol, DTS:X, and the DTS:X logo are registered trademarks or trademarks of DTS, Inc. in the United States and/or other countries. • The Spotify software is subject to third party licenses found here: [www.spotify.com/connect/third-party-licenses](http://www.spotify.com/connect/third-party-licenses) • Other trademarks and trade names are those of their respective owners.

Denon is a trademark or registered trademark of D&M Holdings, Inc.

\* All specs can be subject to change \* Available only in Black